


INSERTS

Series A

7203.6001.0

3P female insert, 10A, 250V, screw

- 10A or 16A maximum current per contact
- Up to 250 V
- Polycarbonate body, silver-plated copper contacts
- Pole number from between 3 and 16

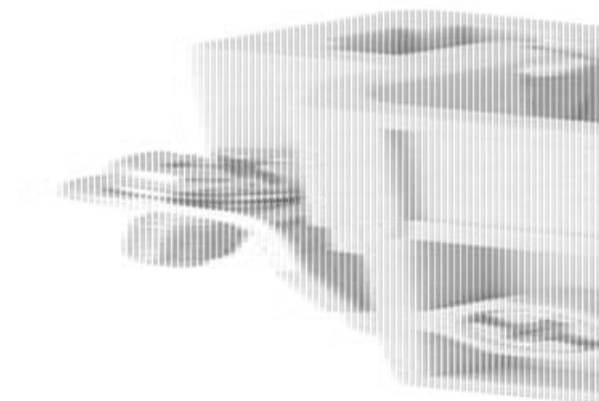

PRODUCT DESCRIPTION

SPECIFICATIONS

Connection Thread	Screw terminal
Connector	Female
Cross-Section Max	2,5 mm ²
Material	Polycarbonate
Materials Contacts	Silver plated copper
Number of poles	3
Operating Voltage AC / DC Max	400 V