

## MOLEX - MPM DUAL DIN OVERMOULDED CABLE

653P3NC131P000

DUAL DIN A connecting cable 2m/13cm PUR


- Dual function from a single cable
- Quick and simple installation
- EN175301-803 (DIN43650)-A/ISO4400



### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                                    |                      |
|------------------------------------|----------------------|
| Cable length                       | 2000 mm              |
| Material Cable                     | PUR/PVC              |
| Halogen free                       | No                   |
| IP Class                           | IP67                 |
| Cross-Section                      | 0.75 mm <sup>2</sup> |
| Color Cable                        | Black                |
| LED indicator                      | No                   |
| Head 1                             | DIN                  |
| Head 2                             | Open                 |
| Temperature Range The Use Of       | -40 °C               |
| Temperature Range For Flexible Use | 90 °C                |
| Temperature Range Flexible Use Of  | -15 °C               |
| Current max                        | 5 A                  |
| Isolation Outer                    | PUR                  |
| Isolation Internal                 | PVC                  |

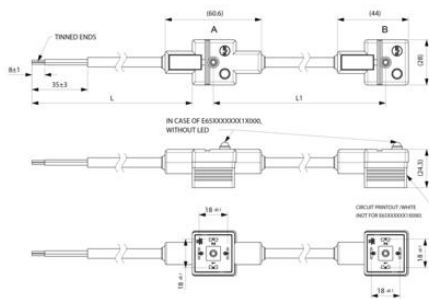

ELECTRICAL DIAGRAM - 00

