



N SERIES, BEACON, Ø90MM

440104413

NES,clear LED 110-240V AC/DC

- Ø90mm Beacon
- Strobe, Flashing, Steady and Multi-colour LED options
- Wide control voltage range



PRODUCT DESCRIPTION

High quality Ø90mm beacons with a robust construction for demanding applications. All models feature IP65 protection and bayonet fittings for simple installation. Models for pole mounting available on request.

The N series comprises the most comprehensive range of high-quality LED technology. It is available as an LED multi-colour lamp and LED continuous / flashing / flashing lamp and multi-flash lamp. With high-power LEDs, it is also suitable for use in extreme lighting conditions. Specially developed for outdoor use, the signal effect is also particularly effective in sunlight. The luminaires are available in the Ø 90 mm size.

Modern LED beacons in a compact design (Ø 90 mm) including high performance models for high signalling requirements, for example, in sunlight, or bright indoors. Excellent light dispersion and signalling effort due to distinct lens optics.

NFS-HP 3 LED strobe patterns externally switchable via terminal (LED double-/6-times/multistrobe). With a wide voltage range due to switched mode power supply (NES, NFS-HP, NMS-HP).


N Series beacons are shock and vibration resistant, maintenance free, long lifetime (> 50.000 h)

Features include inrush current limitation, emc-safe, leakage up to 0,003 A.

SPECIFICATIONS

Color House	Black
Color Lens	Clear
Diameter	90 mm
Flash Frequency	2 Hz
Height	101 mm
IP Class	IP65, IP67
Light source	LED
Light type	Flash, Steady

Mounting	None
Nominal current	40 mA
Nominal Supply Voltage	110-240 V AC
Operational Temperature	-30°C ... 60°C
Terminal connection	2.5 mm ²
Weight	250 g

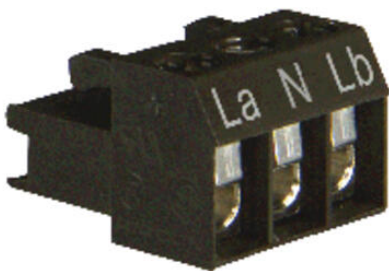

NES



La	N	Lb	
X	X	X	~2 Hz
X	X	X	
X	X	X	

Jumper
Cavalier
Brücke
Ponticello
Ponte
Puente

