



SIGNAL TOWER, HALF DOME 90

H90K0243AGD

Signal tower,HALFDOME 90 24V AC/DC

- Compact (ready to use) LED signal tower in half dome design
- Tower is built and supplied according to customer's requirements
- Wide control voltage range



PRODUCT DESCRIPTION






The Half Dome 90 signal tower is a high quality option for signalling, with a pleasing look and 180° viewing angle the Half Dome is perfect for any high end signalling requirements.

- Visual-audible LED signal tower in half dome design
 - For universal applications (industrial, building and others)
 - Any colour combination and housing size (2 – 5 positions) available
 - 6 lens colours, 3 housing colours (grey, chrome, black)
 - LED steady light or LED flashing light for each position selectable
 - High protection class IP 65 – suitable for outdoor and indoor
 - For horizontal and vertical mounting
 - Particular lens optics with reflective coating
- optimal signalling and visibility from each viewing angle (180°)
- moving bright LED light
- Optional piezo buzzer in upper housing area available
- tone types continuous and pulsing
- sound pressure individually adjustable ~70-90 dB (A)at 1M
- SPS-fit (leakage, inrush current)
 - Available in nominal voltages 12 V ac/dc, 24 V ac/dc, 110/120 V ac and 230/240 V ac
 - Certified to UL type 4/4X/13




SPECIFICATIONS






Color House	Silver
Color Lens	Green, Orange, Red
Diameter	90 mm
IP Class	IP65
Light source	LED
Light type	Green LED, Orange LED, Red LED
Mounting	Wall

Nominal current max	0.043 A
Nominal current min	0.043 A
Supply Voltage	24 V
Temperature range from	-30 °C
Temperature range to	50 °C
Terminal connection	2.5 mm ²

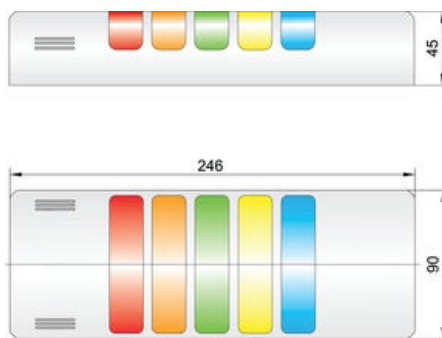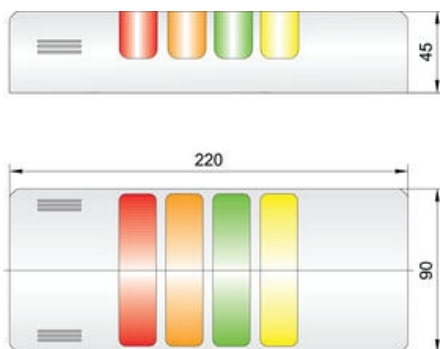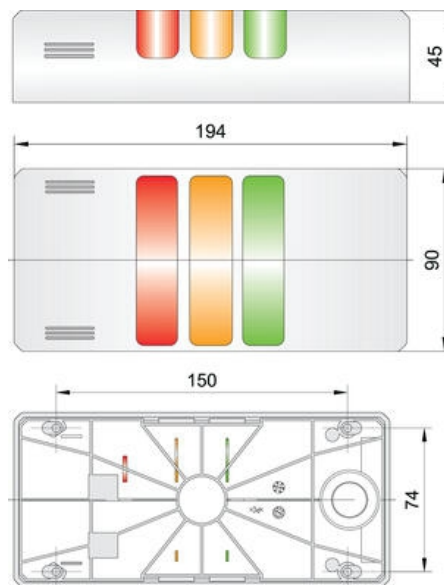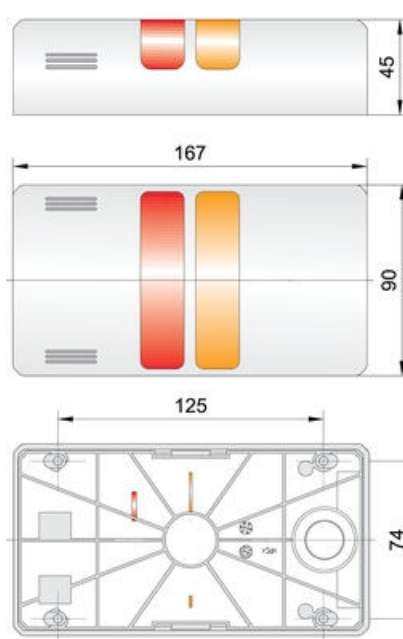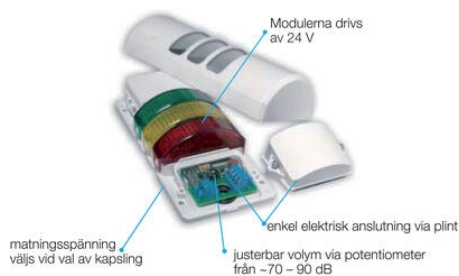

HOUSING COLOUR (1)		
SP7	0	
chrome	1	
black	2	
NOMINAL VOLTAGE (2)		
12V AC/DC	10	
24V AC/DC	20	
180/240 V AC	30	
230/240 V AC	40	
MODULES (3-8)		
Module type (3)		
HL	LED steady light	1
HL3	LED flashing light	2
HD2	Pulse beeper, continuous and pulsing tone, 70-90 dB	10
Light colour (4)		
orange	1	
red	2	
clear	3	
blue	4	
green	5	
yellow	6	

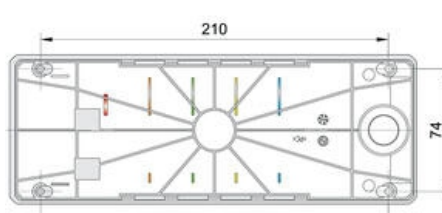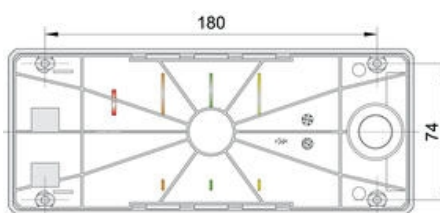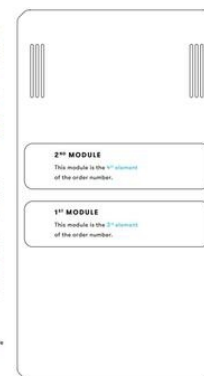

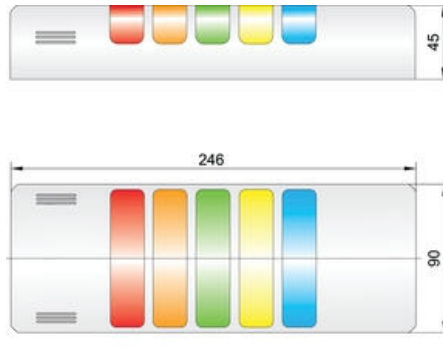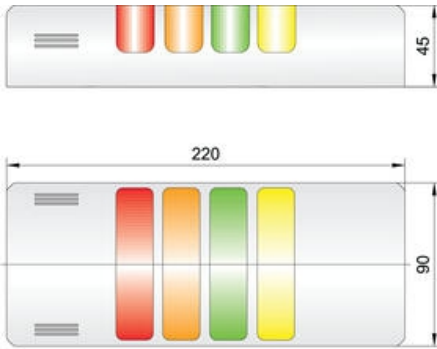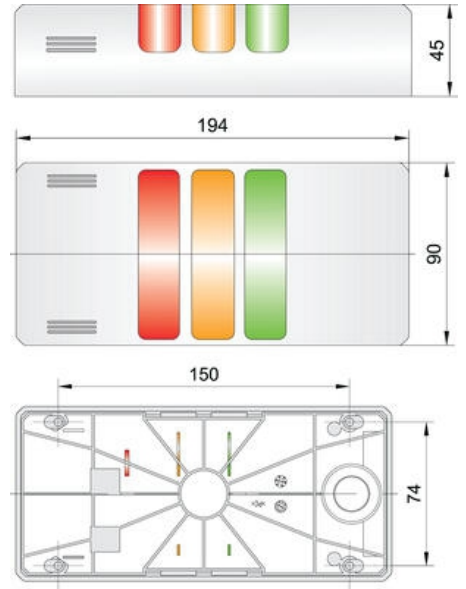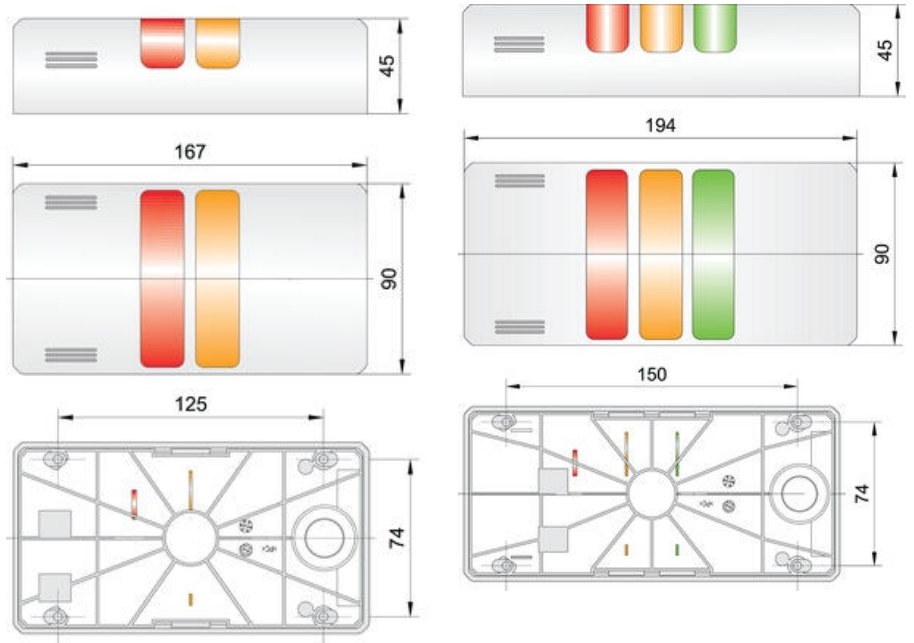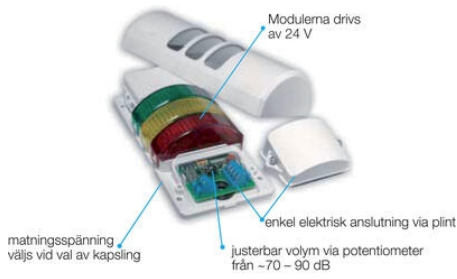

HOUSING COLOUR (1)

IP10	01
chrome	02
black	03

NOMINAL VOLTAGE (2)

12 V AC/DC	10
24 V AC/DC	20
120V/24 V AC	30
230/240 V AC	40

MODULES (3-8)

Module light (1)	1
HL LED steady light	2
HE LED flashing light	3
HCE Pulse laser, continuous and pulsing tone, 70-90 dB	4

Lens colour (5)

orange	1
red	2
clear	3
blue	4
green	5
yellow	6

