



PANEL MOUNT BEACON, Ø65, Ø45 AND Ø30MM, I SERIES

802550405

IML LED RED/YELLOW/GREEN 24V AC/DC

- Ø65, Ø45 and Ø30mm Panel mount beacons
- Strobe, Flashing and Steady LED options
- Wide control voltage range



PRODUCT DESCRIPTION

The I series offers a high quality, bright, panel mounted beacon. The units can be single or dual colour, have multiple colour and voltage options and in the case of IMM/IMM can be pre-cable with IP67 Protection.

- Versatile usable panel mount beacon range for mounting in Ø 22,5 mm bore holes (adapter for 30,5 mm bore holes available)
- 3 dimensions (Ø 65, 45, 30 mm)
- Comprehensive product range M22 panel mount beacon with demountable plug in terminal or (individually) prewired
- Complete range of LED steady/flashing/strobe and multi colour models for versatile applications in the industry, enclosures, etc.
- Maintenance free, low current consumption, long life time, shock and vibration-proof
- Multi colour models in 6 LED colours individually selectable
- Housing and lenses made of impact resistant polycarbonate, housing colour black or grey
- PLC fit (leakage/inrush current)
- Particular lens pattern for optimum light dispersion
- Fastening tool for 30 mm models for difficult reachable positions available


SPECIFICATIONS

Color House	Black
Color Lens	Clear
Diameter	60 mm
IP Class	IP65
Light source	LED
Light type	Multi
Mounting	Panel mount
Nominal current max	0.043 A
Nominal current min	0.043 A
Operating Voltage AC / DC Max	26.4 V
Supply Voltage	24 V

Supply Voltage AC / DC Min	21.6 V
Temperature range from	-25 °C
Temperature range to	50 °C
Terminal connection	2.5 mm ²

Val av sken

La≈ N	Lb≈	
x	x	Fast sken, färg 1
x	x	Fast sken, färg 2

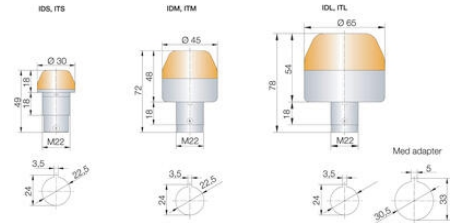

Val av sken

La≈ N	Lb≈	
x	x	Fast sken, färg 1
x	x	Fast sken, färg 2

