



## PANEL MOUNT BEACON, Ø65, Ø45 AND Ø30MM, I SERIES

802550310

Panel mount multi-colour beacon, Ø65mm, 110-120 V ac, IML

- Ø65, Ø45 and Ø30mm Panel mount beacons
- Strobe, Flashing and Steady LED options
- Wide control voltage range



### PRODUCT DESCRIPTION

The I series offers a high quality, bright, panel mounted beacon. The units can be single or dual colour, have multiple colour and voltage options and in the case of IMM/IMM can be pre-cable with IP67 Protection.

- Versatile usable panel mount beacon range for mounting in Ø 22,5 mm bore holes (adapter for 30,5 mm bore holes available)
- 3 dimensions (Ø 65, 45, 30 mm)
- Comprehensive product range M22 panel mount beacon with demountable plug in terminal or (individually) prewired
- Complete range of LED steady/flashing/strobe and multi colour models for versatile applications in the industry, enclosures, etc.
- Maintenance free, low current consumption, long life time, shock and vibration-proof
- Multi colour models in 6 LED colours individually selectable
- Housing and lenses made of impact resistant polycarbonate, housing colour black or grey
- PLC fit (leakage/inrush current)
- Particular lens pattern for optimum light dispersion
- Fastening tool for 30 mm models for difficult reachable positions available


### SPECIFICATIONS

Color House	Black
Color Lens	Clear
Diameter	60 mm
IP Class	IP65
Light source	LED
Light type	Multi
Mounting	Panel mount
Operating Voltage AC Max	132 V AC
Operating Voltage AC Min	99 V AC
Supply Voltage	110 V
Temperature range from	-25 °C

Temperature range to	50 °C
Terminal connection	2.5 mm <sup>2</sup>

Val av sken

La≈ N	Lb≈	
x	x	Fast sken, färg 1
x	x	Fast sken, färg 2

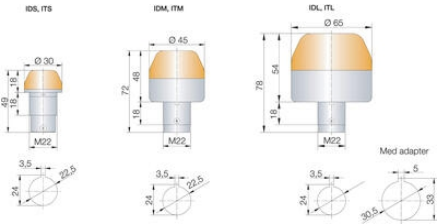

Val av sken

La≈ N	Lb≈	
x	x	Fast sken, färg 1
x	x	Fast sken, färg 2

