



CUBIC MULTI SIREN 8-63 TONER SERIES "A"

874060405

ASS-P SOUNDER 8T RED 24VAC/DC

- IP66
- Up to 127 dB
- Up to 63 tones
- Can be combined with series "Q"



PRODUCT DESCRIPTION


Our robust and powerful Multisiren is suitable for industrial, process, fire alarm, marine, etc. With up to 63 different tones, including several international standards, it is a warning product for many applications. The sirens can be mounted directly on the wall or on the ceiling and have cable inlets at the bottom and side.

The siren has three external alarms, as well as automatic synchronization when using multiple sirens. Series A sirens can be combined with other units of series A and Q.

SPECIFICATIONS

Color House	Red
Diameter	94 mm
IK Class	9
IP Class	IP66
Mounting	Independent
Nominal current max	0.1 A
Nominal current min	0.1 A
Number of tones	8
Operating Voltage AC / DC Max	26.4 V
Sound control	Yes
Sound level max	108 dB
Supply Voltage	24 V
Supply Voltage AC / DC Min	21.6 V


Temperature range from	-30 °C
Temperature range to	60 °C
Terminal connection	2.5 mm ²
Tone frequency max	4600 Hz
Tone frequency min	500 Hz
Weight	300 g



The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.



Distance (m)	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120
1	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114
2	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110
3	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106
5	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100
10	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94
20	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
30	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
50	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92
100	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94
200	38	43	48	53	58	63	65	67	69	71	73	75	77	79	81	83	85	87	89	91	93
500	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90

The sound pressure decreases by 6 dB when doubling the distance

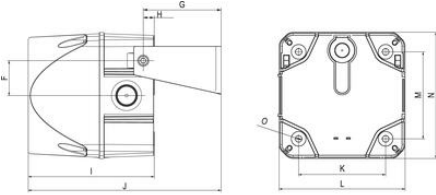

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
Size 2	143	95	10	32	50	36.5	81.5	11.5	131.5	86.8	91	131.8	91	131.8	6.5
Size 3	199	113	16	48	70	55	105.5	16.5	168.9	118.4	124	183.5	124	183.5	6.5
Size 4	243.3	140	25	70	100	63	133.3	16.8	216.9	146.6	157	228.4	157	228.4	6.5


Measuring unit mm

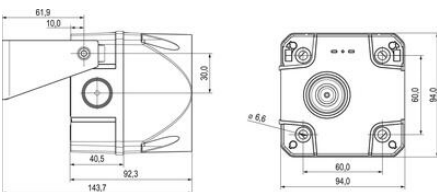The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120
1	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114
2	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110
3	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106
5	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100
10	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94
20	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
30	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
50	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92
100	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94
200	38	43	48	53	58	63	65	67	69	71	73	75	77	79	81	83	85	87	89	91	93
500	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90

The sound pressure decreases by 6 dB when doubling the distance

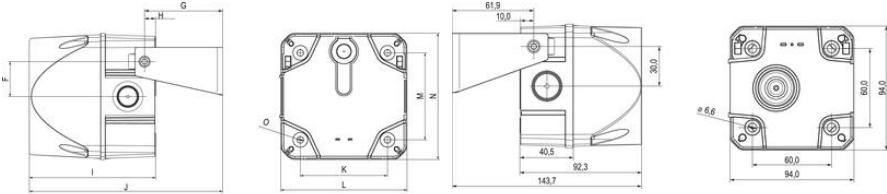

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
Size 2	143	95	10	32	50	36.5	81.5	11.5	131.5	86.8	91	131.8	91	131.8	6.5
Size 3	199	113	16	48	70	55	105.5	16.5	168.9	118.4	124	183.5	124	183.5	6.5
Size 4	243.3	140	25	70	100	63	133.3	16.8	216.9	146.6	157	228.4	157	228.4	6.5

Measuring unit mm