# PANEL MOUNT BEACON WITH SOUNDER, E SERIES

813511313
ELM BUZZER+LED AMBER 230VAC

- Ø 22.5mm Hole mounted panel mount buzzer with LED beacon
- 85-103 dB Range
- Continuous, Pulsing or wobble tones



### PRODUCT DESCRIPTION

The E series of panel mounted LED buzzers offers a high quality and flexible signalling solution.

- universally useable panel mount buzzer with LED control light
- sizes Ø 65 mm – Ø 45 mm
- models:

ELG-ELM panel mount buzzer – LED control light sound and light synchronized continuous tone – steady light pulsing tone – flashing light in pulse frequency wobble tone – flashing light in pulse frequency

EDG-EDM panel mount buzzer – LED control light continuous tone and steady light separately switchable

- well distinguishable tone types via terminal selectable (ELG)
- volume also in mounted condition infinitely adjustable
- LED control light – high brightness, maintenance free
- PLC fit (leakage/inrush current)
- for mounting in Ø 22 mm and 30,5 mm bore holes (with adapter)

## SPECIFICATIONS

| | |
|---|---|
| **Color House** | Black |
| **Color Lens** | Orange |
| **Diameter** | 45 mm |
| **Flash Frequency** | 2 Hz |
| **IP Class** | IP65 |
| **Light source** | LED |
| **Light type** | Orange LED |
| **Mounting** | Panel mount |

| | |
|---|---|
| **Nominal current max** | 0.04 A |
| **Nominal current min** | 0.04 A |
| **Number of tones** | 3 |
| **Operating Voltage AC Max** | 253 V AC |
| **Operating Voltage AC Min** | 207 V AC |
| **Sound control** | Yes |
| **Sound level max** | 98 dB |
| **Sound level min** | 85 dB |
| **Supply Voltage** | 230 V |
| **Temperature range from** | -25 °C |
| **Temperature range to** | 60 °C |
| **Terminal connection** | 2.5 mm² |
| **Tone frequency max** | 3500 Hz |
| **Tone frequency min** | 3500 Hz |
| **Weight** | 65 g |

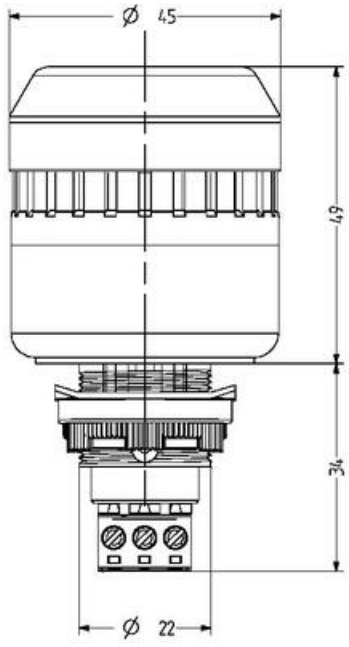


## Tone table

| Tone and light selection on terminal | | | |
|---|---|---|---|
| La | N | Lb | Tone and light synchronized |
| X | X | | pulsing tone / LED flashing light |
| X | X | X | continuous tone / steady light |




