

Q SERIES, CUBIC BEACON, 94MM, 132MM, 184MM OR 228MM



874265408 QDM LED BEACON 24-48VAD BLUE

- 94mm, 132mm, 184mm or 228mm Cubic beacon
- Steady, Flashing, Strobe and Multi-strobe light options
- Wide control voltage range



PRODUCT DESCRIPTION

The Q series is the largest and most comprehensive beacon series in four sizes with a square design. The extensive product range is available in 94 mm, 132 mm, 184 mm and 228 mm sizes and is available with state-of-the-art LED or xenon technology.

The Q series offers a long lifetime, low current consumption and is vibration proof. The LED steady/flashing beacons are available in all sizes and the LED multi strobe beacons in 184mm and 228mm. It is also available in conventional xenon strobe technique This unique range includes LED technique with high signalling effect 3 strobe patterns (double/6 times/multi strobe) and externally switchable.

For applications in the industry, process control, fire/gas alarm, marine, and is also fit for plc applications (leakage, inrush current)

Luminaires of the LED series boast a particularly high luminous intensity of up to 400 candela thanks to special high-power LEDs. The unique calotte design gives the signal effect both frontally and laterally. The calottes of the Q series are available in six different colours and are made of highly impact-resistant polycarbonate, which is UV-stabilised and guarantees colour fastness even under extreme conditions. With a protection class of IP66 and an impact resistance of IK09, the Q series is suitable for industrial, processing and marine applications.

SPECIFICATIONS

Color House	Red
Color Lens	Blue
Diameter	132 mm
Flash Frequency	1 Hz
Height	138 mm
Height IK Class	138 mm 9

Lig	ht	ty	pe

Flash, Steady


Nominal current


Operational Temperature

500 mA -30°C ... 60°C

Terminal connection

2.5 mm²

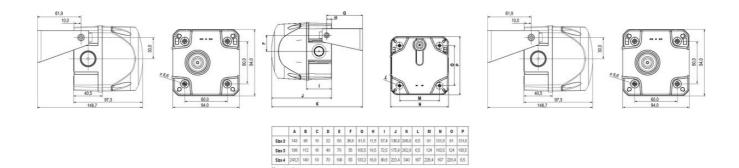



A
B
C
D
E
F
G
H
I
J
K
L
III
M
O
P

Size 2
140
65
10
12
60
96.5
81.5
15.5
57.4
106.8
96.6
85.7
10
10
10.10
91
10.10
91
10.10
91
10.10
91
10.20
94
10.55
105.7
105.8
96.7
10.21
80
10.25
104
10.55
104
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
104.1
105.5
<t