


FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3291.4

FSIK 4/2A/LED 12-30V AC/DC BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

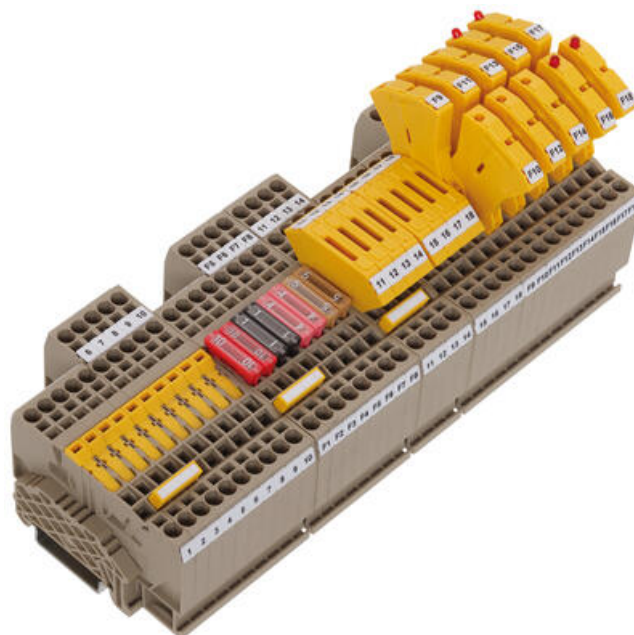

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, CSA US, KEMA KUR
Color	Black
Connections	2
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	2.5 mm ²
Cross section stranded with ferrule from	0.22 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	4 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
Flamklass	UL94-V0

Fuse size	5 x 20 mm
Height	69 mm
Height TS 35/7.5	70 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-3:2009
Length	67.5 mm
Mounting	TS 35/7,5
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	25
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	6.3 A
Rated current CSAus	6.3 A
Rated Current IEC	6.3 A
Rated Current To UL	6.3 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	10
Rated voltage CSAus	300 V
Rated Voltage To UL	300 V
Stripping Length	12 mm
Tariff code	85369010
UL test standard	UL 1059
Weight	87.66 g
Width	6.1 mm
Voltage CSA	300 V