
CONTACLIP

FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3239.4
FSIK 4/2A/MT BK

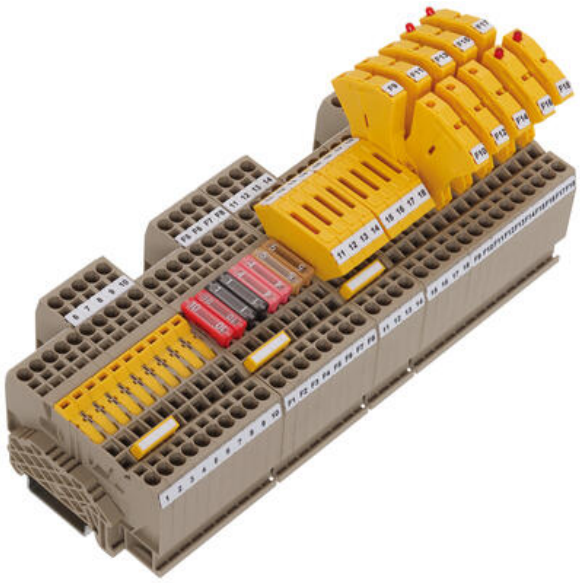

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	Pending, CSA, cCSAus, KEMA KUR
Color	Black
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	1
Cross section single wire from	0.2 mm²
Cross section single wire to	4 mm²
Cross section stranded wire from	0.2 mm²
Cross section stranded wire to	2.5 mm²
Cross section stranded with ferrule from	0.2 mm²
Cross section stranded with ferrule to	2.5 mm²
Cross-Section	4 mm²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
Flamklass	UL94-V0
Fuse size	Blade Disconnect

Height	46 mm
Height TS 35/7.5	47 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-3:2009
Length	67.5 mm
Mounting	TS 35/7,5
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated Current	18 A
Rated Current CSA	15 A
Rated current CSAus	15 A
Rated Current IEC	18 A
Rated Current To UL	15 A
Rated impulse voltage	6 kV
Rated Voltage	400 V
Rated voltage CSAus	300 V
Rated Voltage IEC	400 V
Rated Voltage To UL	300 V
Rated voltage UL	300
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	10
Stripping Length	12 mm
Tariff code	85369010
UL test standard	UL 1059
Voltage CSA	300 V
Weight	13.72 g
Width	6.1 mm