


FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3239.4

FSIK 4/2A/MT BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

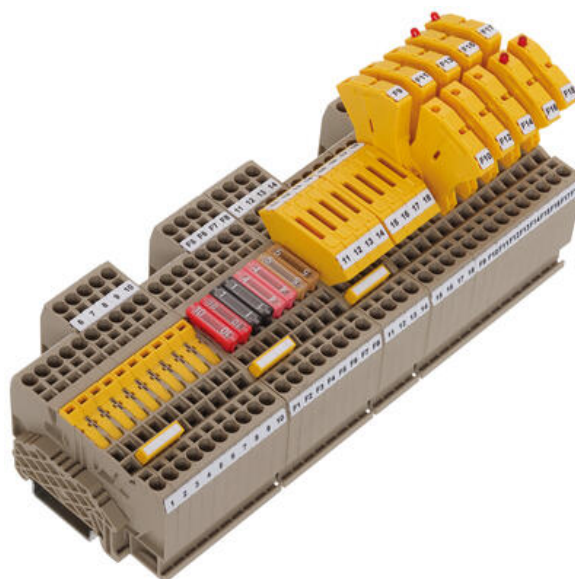

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	Pending, CSA, cCSAus, KEMA KUR
Color	Black
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	1
Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	2.5 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	4 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
Flamklass	UL94-V0
Fuse size	Blade Disconnect

Height	46 mm
Height TS 35/7.5	47 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-3:2009
Length	67.5 mm
Mounting	TS 35/7,5
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated Current	18 A
Rated Current CSA	15 A
Rated current CSAus	15 A
Rated Current IEC	18 A
Rated Current To UL	15 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	10
Rated Voltage	400 V
Rated voltage CSAus	300 V
Rated Voltage IEC	400 V
Rated Voltage To UL	300 V
Rated voltage UL	300
Stripping Length	12 mm
Tariff code	85369010
UL test standard	UL 1059
Weight	13.72 g
Width	6.1 mm
Voltage CSA	300 V