

EARTH TERMINALS - SNAP ON - SSL


2.5-35 MM²

SSL

17107.2

SSL 4/2A, 4mm² Snap on earth terminal

- Snap on construction
- Secure fixings on both sides of the rail
- Can be cross connected
- Material polyamide 6.6- UL94-V0
- emperature resistance -40 °C...+120 °C

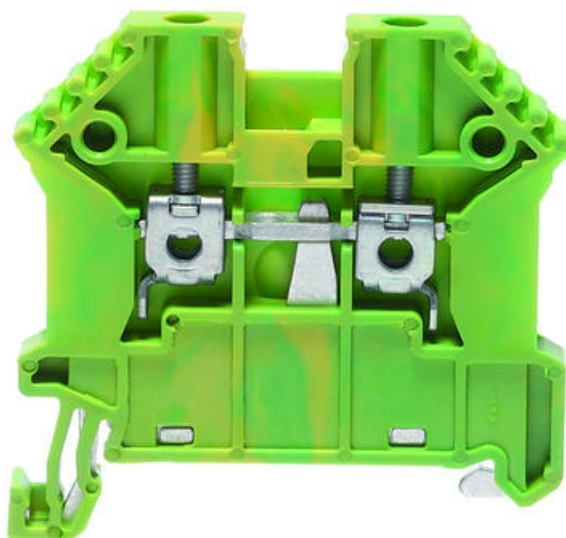

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Color	Green/yellow
Connections	2
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0.2 mm ²
Cross section single wire to	6 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	6 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	4 mm ²
Cross-Section	4 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

Explosion proof	Yes
Flamklass	UL94-V0
GL test standard	IEC 60947-7-2:2009
Height TS 35/7.5	47 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-2:2009
Length	48 mm
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	1
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A4
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	10
Screw size	M 3
Screw type	Slotted
Stripping Length	10 mm
Tariff code	85369010
Torque max	1
Torque Min	0.5
Type of terminal	Screw Terminals, DIN Rail terminals
UL test standard	UL 1059
Weight	13.57 g
Width	6 mm

