


TRIPLE DECK TERMINALS - IKD 2.5MM²/VMAK

IKD, VMAK

1290.2

IKD 2,5 NPN/DC/LED(GN)/24V BG

- For connecting encoders or motor outputs
- Material polyamide 6.6
- Colour marked versions available
- Temperature resistance -40 °C...+150 °C
- Flammability class V2

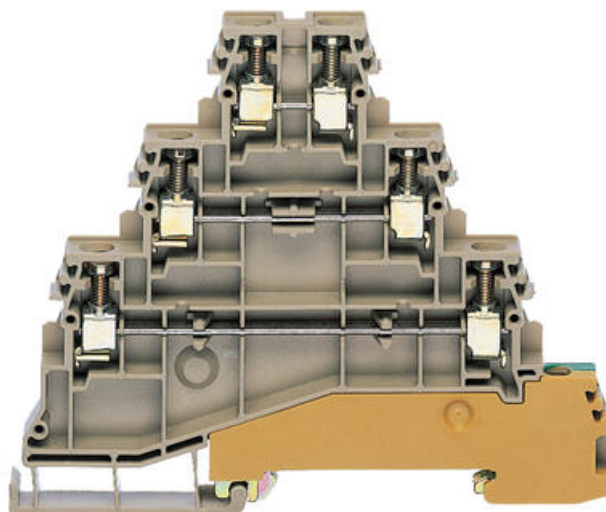

PRODUCT DESCRIPTION

SPECIFICATIONS

Additional information	with LED status display
Approvals	UL, CSA, CSA US, cUL, KEMA KUR, EAC
Color	Beige
Connections	6
Contamination degree	3
Country of origin	BG
Cross connect channels	3
Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	2.5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158

EAC test standard	TR ZU 004/2011
Flamklass	UL94-V2
Height TS 32	62.8 mm
Height TS 35/7.5	58.3 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	84.8 mm
Mounting	TS 35/7,5
Number of levels	3
Operating temperature from	-40 °C
Operating temperature to	105 °C
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated current cUL	20 A
Rated Current IEC	24 A
Rated Current To UL	20 A
Rated impulse voltage	4 kV
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	14
Rated voltage cUL	300 V
Rated Voltage IEC	250 V
Rated Voltage To UL	300 V
Screw size	M 2,4
Screw type	Slotted
Stripping Length	7 mm
Tariff code	85369010
Torque max	0.8
Torque Min	0.4
Type of terminal	Screw Terminals, DIN Rail terminals
UL test standard	UL 1059
Weight	17.54 g
Width	5 mm

