


FEED THROUGH TERMINALS - ZRK 2.5-16 MM²

ZRK

3516.2

ZRK 4/3A Beige, 4mm² Tension spring, feed through, 1 in, 2 out

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

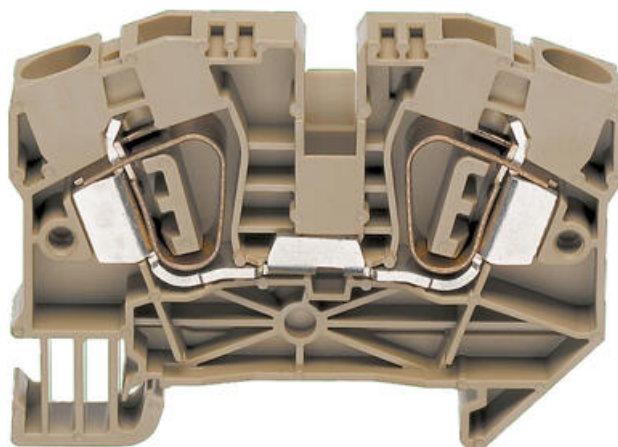

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, KEMA KUR, EAC
Color	Beige
Connections	3
Contamination degree	3
Country of origin	CZ
Cross connect channels	2
Cross section single wire from	0.5 mm ²
Cross section single wire to	6 mm ²
Cross section stranded wire from	0.6 mm ²
Cross section stranded wire to	6 mm ²

Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	4 mm ²
Cross-Section	4 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
GL test standard	IEC 60947-7-1:2009
Height TS 35/7.5	42 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	78.5 mm
Load Current Max	32 A
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A4
Rated Current CSA	35 A
Rated current CSAus	35 A
Rated Current IEC	32 A
Rated Current To UL	35 A
Rated impulse voltage	8 kV
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	10
Rated voltage CSAus	600 V
Rated Voltage IEC	800 V
Rated Voltage To UL	600 V
Stripping Length	12 mm
Tariff code	85369010

UL test standard	UL 1059
Weight	13.6 g
Width	6.1 mm
Voltage CSA	600 V

