


PICK-OFF TERMINALS AND TEST ADAPTERS

MAG, SMAG, STA, TA, ZTA

3741.2

ZTA 4, Test adaptor for ZRK/ZSL 4

- STA, SMAG compatible with SRK series
- SMAG extends standard feed-through terminal up to 4 connections
- STA test adapters for SRK series
- TA test adapters for RK series
- ZTA Test adaptors for ZIZA/ZRK series

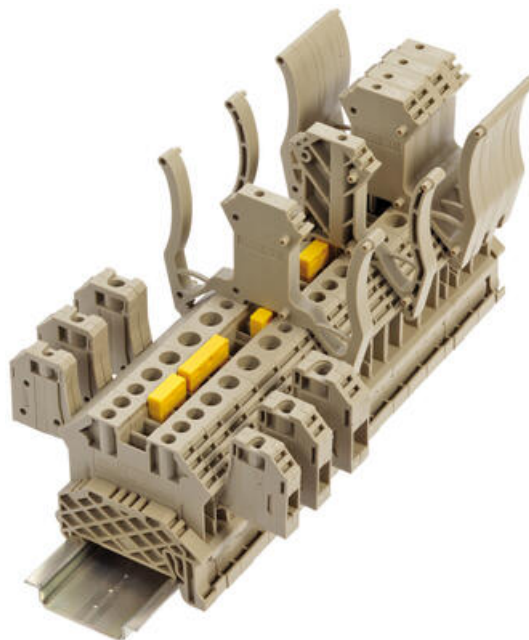

PRODUCT DESCRIPTION

CONTA-CLIP offers specific and innovative accessories for the SRK I SSL screw connection system.

Pick-off terminals SMAG

- The SMAG pick-off terminals make possible one or two additional extra wire connectors onto the SRK terminal blocks and therefore extend the standard feed-through terminal by up to four connectors.
- The SMAGs are mechanically snapped into the SRK terminal blocks.
- The SMAG busbar is connected via the corresponding base connection of the terminal block, the rated cross section is thereby reduced to the next lower size.

Test adapter STA

- The ST test adapter can be used to quickly and safely test pre-wired terminal blocks.
- A test plug block can be mounted with any number of poles using the locking pegs and the STA ZP intermediate plate with widths from 1 to 3 mm. The STA ZP intermediate plate allows the assembly of a test plug block, which can also be mounted on different block widths (SRK/SSL 2.5 | 4 | 6 | 10).
- Thanks to its innovative design the STA test adapter can be rotated through 180°. It can therefore also be mounted onto the SRK terminal block, whereby one of the cross-connection channels is already occupied by a cross-connector.

SPECIFICATIONS

| | |
|----------------------------------|--|
| Additional information | for tension-spring terminals 4 mm ² |
| Color | Beige |
| Country of origin | DE |
| Cross section stranded wire from | 0.5 mm ² |
| Cross section stranded wire to | 1 mm ² |
| Flamklass | UL94-V2 |
| Insulation Material | Polyamide 6.6 |
| Length | 32.3 mm |
| Operating temperature from | -40 °C |
| Operating temperature to | 105 °C |
| Pack Size | 10 |
| Pitch | 6.1 mm |
| Stripping Length | 5 mm |
| Tariff code | 85369010 |
| Weight | 2.8 g |