


FEED THROUGH TERMINALS - ZRK 2.5-16 MM²

ZRK

3597.2

ZRK 10/2A Beige, 10mm² Tension spring, feed through

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

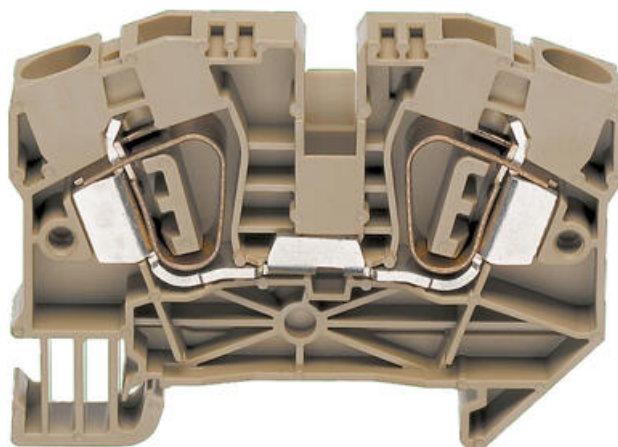

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, CSA US, KEMA KUR, EAC
Color	Beige
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	2
Cross section single wire from	1.5 mm ²
Cross section single wire to	16 mm ²
Cross section stranded wire from	1.5 mm ²
Cross section stranded wire to	10 mm ²

Cross section stranded with ferrule from	1.5 mm ²
Cross section stranded with ferrule to	10 mm ²
Cross-Section	10 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	50.5 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	73.5 mm
Load Current Max	57 A
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	B6
Rated Current CSA	55 A
Rated current CSAus	55 A
Rated Current IEC	57 A
Rated Current To UL	55 A
Rated impulse voltage	8 kV
Rated wire cross section from (AWG)	16
Rated wire cross section to (AWG)	6
Rated voltage CSAus	500 V
Rated Voltage IEC	1000 V
Rated Voltage To UL	500 V
Stripping Length	18 mm
Tariff code	85369010
UL test standard	UL 1059
Weight	26 g

Width	10.1 mm
Voltage CSA	500 V

