


FEED THROUGH TERMINALS - ZRK 2.5-16 MM²

ZRK

3636.2

ZRK 16/2A Beige, 16mm² Tension spring, feed through

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

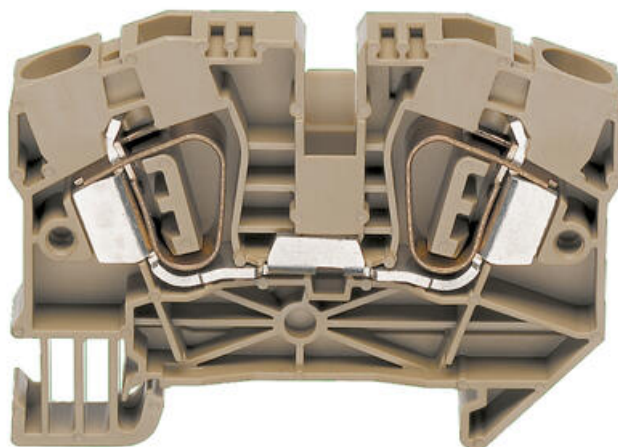

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, CSA US, KEMA KUR, EAC
Color	Beige
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	2
Cross section single wire from	1.5 mm ²
Cross section single wire to	25 mm ²
Cross section stranded wire from	1.5 mm ²
Cross section stranded wire to	16 mm ²

Cross section stranded with ferrule from	1.5 mm ²
Cross section stranded with ferrule to	16 mm ²
Cross-Section	16 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	51.5 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	81.5 mm
Load Current Max	76 A
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A7
Rated Current CSA	65 A
Rated current CSAus	65 A
Rated Current IEC	76 A
Rated impulse voltage	8 kV
Rated wire cross section from (AWG)	14
Rated wire cross section to (AWG)	4
Rated voltage CSAus	1000 V
Rated Voltage IEC	1000 V
Stripping Length	18 mm
Tariff code	85369010
UL test standard	UL 1059
Weight	36.45 g
Width	12.1 mm
Voltage CSA	1000 V

