


FEED THROUGH TERMINALS - ZRK 2.5-16 MM²

ZRK

3581.5

ZRK 6/2A Blue, 6mm² Tension spring, feed through

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

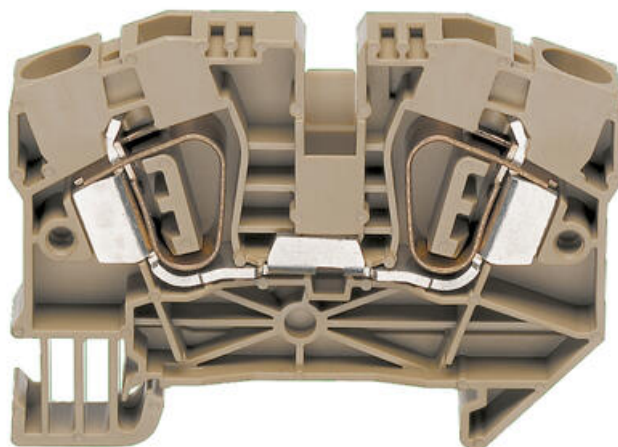

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Color	Blue
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0.5 mm ²
Cross section single wire to	10 mm ²
Cross section stranded wire from	0.5 mm ²
Cross section stranded wire to	10 mm ²

Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	6 mm ²
Cross-Section	6 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
GL test standard	IEC 60947-7-1:2009
Height TS 35/7.5	47.5 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	65 mm
Load Current Max	41 A
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A5
Rated Current CSA	50 A
Rated current CSAus	50 A
Rated current cUL	50 A
Rated Current IEC	41 A
Rated Current To UL	50 A
Rated impulse voltage	8 kV
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	8
Rated voltage CSAus	600 V
Rated voltage cUL	600 V
Rated Voltage IEC	1000 V
Rated Voltage To UL	600 V

Stripping Length	13 mm
Tariff code	85369010
UL test standard	UL 1059
Weight	17.8 g
Width	8.1 mm
Voltage CSA	600 V

