


## EARTH TERMINALS - ZSL 2.5-16MM<sup>2</sup>

ZSL

3510.2  
ZSL 2,5/2A GNYE

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

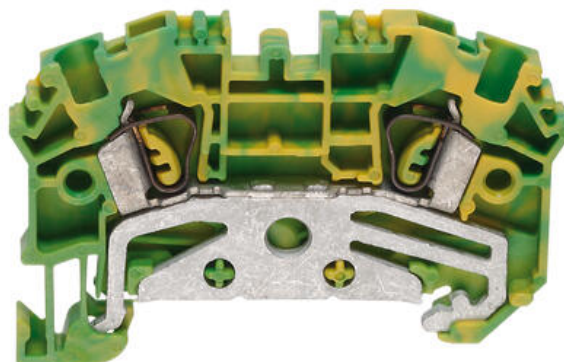

### PRODUCT DESCRIPTION

## SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Color	Green/yellow
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	0
Cross section single wire from	0.5 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0.5 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0.5 mm <sup>2</sup>
Cross section stranded with ferrule to	2.5 mm <sup>2</sup>
Cross-Section	2.5 mm <sup>2</sup>
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
GL test standard	IEC 60947-7-2:2009
Height TS 35/7.5	39 mm

<b>Insulation Material</b>	Polyamide 6.6
<b>KEMA KEUR test standard</b>	EN 60947-7-2:2009
<b>Length</b>	59 mm
<b>Mounting</b>	TS 35/7,5
<b>Number of levels</b>	1
<b>Number of test pick off options</b>	2
<b>Operating temperature from</b>	-40 °C
<b>Operating temperature to</b>	120 °C
<b>Overvoltage category</b>	III
<b>Pack Size</b>	100
<b>Plug gauge acc. EN 60 947-1</b>	A3
<b>Rated wire cross section from (AWG)</b>	20
<b>Rated wire cross section to (AWG)</b>	12
<b>Stripping Length</b>	10 mm
<b>Tariff code</b>	85369010
<b>UL test standard</b>	UL 1059
<b>Weight</b>	12 g
<b>Width</b>	5.1 mm

