


## EARTH TERMINALS - ZSL 2.5-16MM<sup>2</sup>

ZSL

3512.2

ZSL 2,5/4A GNYE

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

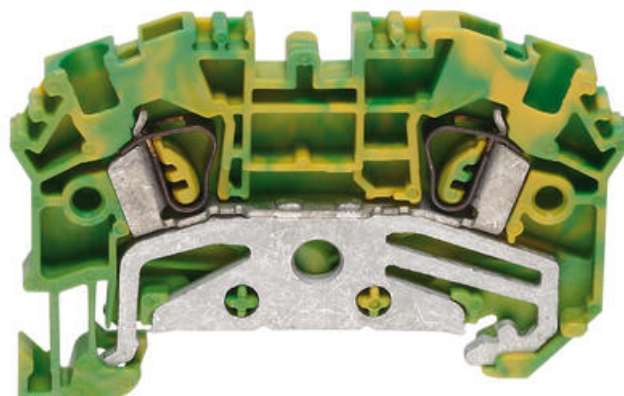

### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                                          |                                         |
|------------------------------------------|-----------------------------------------|
| Approvals                                | UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC |
| Color                                    | Green/yellow                            |
| Connections                              | 4                                       |
| Contamination degree                     | 3                                       |
| Country of origin                        | BG                                      |
| Cross connect channels                   | 0                                       |
| Cross section single wire from           | 0.5 mm <sup>2</sup>                     |
| Cross section single wire to             | 4 mm <sup>2</sup>                       |
| Cross section stranded wire from         | 0.5 mm <sup>2</sup>                     |
| Cross section stranded wire to           | 4 mm <sup>2</sup>                       |
| Cross section stranded with ferrule from | 0.5 mm <sup>2</sup>                     |
| Cross section stranded with ferrule to   | 2.5 mm <sup>2</sup>                     |
| Cross-Section                            | 2.5 mm <sup>2</sup>                     |
| CSA test standard                        | C22.2 No 158                            |
| CSAus test standard                      | UL 1059                                 |
| cUL test standard                        | C22.2 No 158                            |
| EAC test standard                        | TR ZU 004/2011                          |
| Flamklass                                | UL94-V0                                 |
| GL test standard                         | IEC 60947-7-2:2009                      |
| Height TS 35/7.5                         | 39 mm                                   |

|                                     |                   |
|-------------------------------------|-------------------|
| Insulation Material                 | Polyamide 6.6     |
| KEMA KEUR test standard             | EN 60947-7-2:2009 |
| Length                              | 83.6 mm           |
| Mounting                            | TS 35/7,5         |
| Number of levels                    | 1                 |
| Number of test pick off options     | 2                 |
| Operating temperature from          | -40 °C            |
| Operating temperature to            | 120 °C            |
| Overvoltage category                | III               |
| Pack Size                           | 100               |
| Plug gauge acc. EN 60 947-1         | A3                |
| Rated wire cross section from (AWG) | 20                |
| Rated wire cross section to (AWG)   | 12                |
| Stripping Length                    | 10 mm             |
| Tariff code                         | 85369010          |
| UL test standard                    | UL 1059           |
| Weight                              | 16 g              |
| Width                               | 5.1 mm            |

