


FUSE TERMINALS - ZTRK 2.5MM², OT/ZS

ZTRK/OT, ZTRK/ZS

3621.2

ZTRK 2,5/3A/ZS BG

- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0
- Current limited by an automotive fuse 10 A

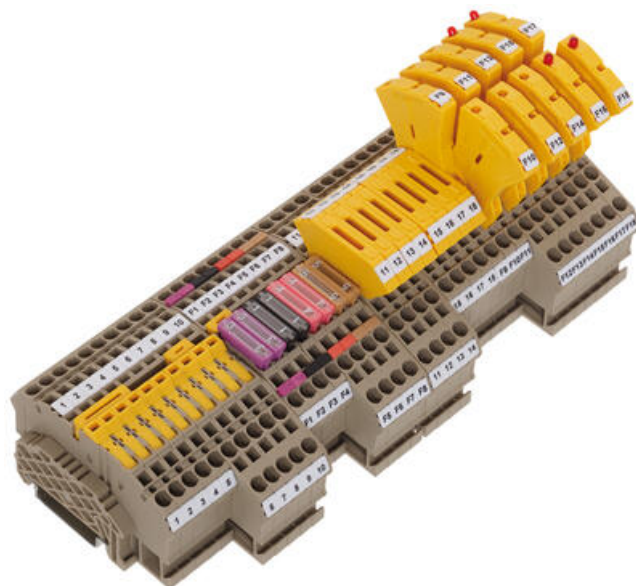

PRODUCT DESCRIPTION

SPECIFICATIONS

Additional information	with fuse plug
Approvals	CSA, CSA US, KEMA KUR
Color	Beige
Connections	3
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0.5 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.5 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	2.5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059

Flamklass	UL94-V0
Fuse max	18 A
Fuse size	5 x 20 mm
Height TS 35/7.5	78.7 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009, EN 60947-7-3:2009
Length	80.2 mm
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	10 A
Rated current CSAus	10 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	12
Rated wire cross section to (AWG)	20
Rated voltage CSAus	300 V
Stripping Length	10 mm
Tariff code	85369010
Weight	19 g
Width	5.1 mm
Voltage CSA	300 V

