


## FUSE TERMINALS - ZTRK 2.5MM<sup>2</sup>, OT/ZS

ZTRK/OT, ZTRK/ZS

3635.2  
 ZS/H0/ZTR

- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0
- Current limited by an automotive fuse 10 A

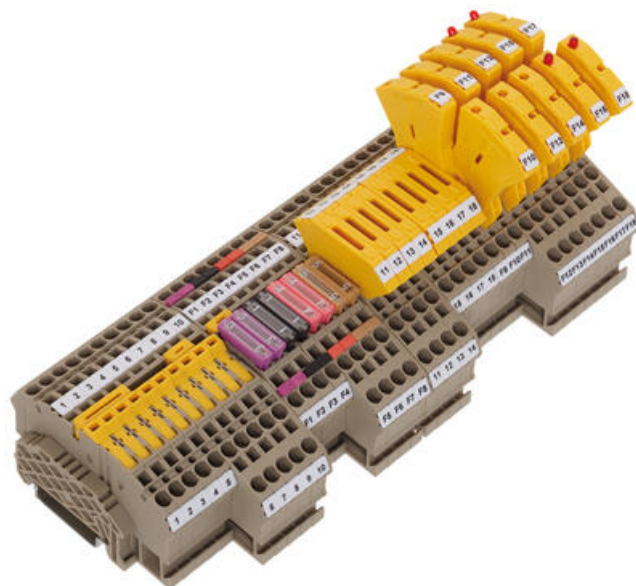

### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                            |                        |
|----------------------------|------------------------|
| Additional information     | without status display |
| Approvals                  | CSA, CSA US            |
| Color                      | Yellow                 |
| Contamination degree       | 3                      |
| Country of origin          | DE                     |
| CSA test standard          | C22.2 No 158           |
| CSAus test standard        | UL 1059                |
| Flamklass                  | UL94-V0                |
| Fuse size                  | 5 x 20 mm              |
| Insulation Material        | Polyamide 6.6          |
| Operating temperature from | -40 °C                 |
| Operating temperature to   | 120 °C                 |
| Overvoltage category       | III                    |
| Pack Size                  | 20                     |
| Rated Current CSA          | 10 A                   |
| Rated current CSAus        | 10 A                   |
| Rated impulse voltage      | 4 kV                   |

|                     |          |
|---------------------|----------|
| Rated voltage CSAus | 300 V    |
| Tariff code         | 85369010 |
| Weight              | 6.55 g   |
| Voltage CSA         | 300 V    |