


## MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3533.2

ZIZA 1.5/4, 4 wire Initiator base terminal with foot

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

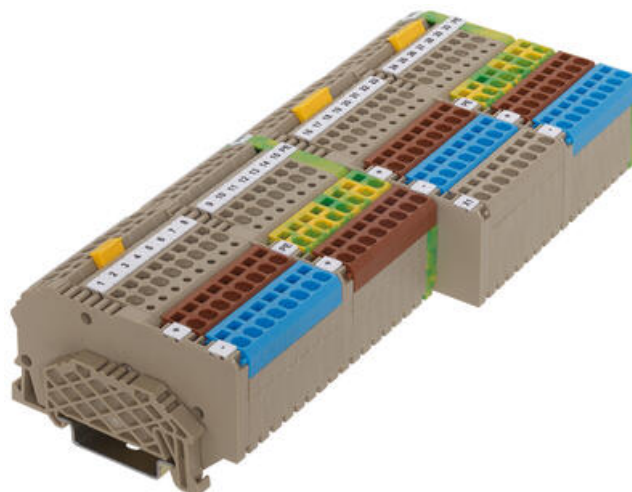

### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                                          |                                    |
|------------------------------------------|------------------------------------|
| Approvals                                | UL, CSA, GL, CSA US, cUL, KEMA KUR |
| Color                                    | Beige                              |
| Connections                              | 5                                  |
| Contamination degree                     | 3                                  |
| Country of origin                        | CZ                                 |
| Cross connect channels                   | 1                                  |
| Cross section single wire from           | 0.5 mm <sup>2</sup>                |
| Cross section single wire to             | 2.5 mm <sup>2</sup>                |
| Cross section stranded wire from         | 0.5 mm <sup>2</sup>                |
| Cross section stranded wire to           | 2.5 mm <sup>2</sup>                |
| Cross section stranded with ferrule from | 0.5 mm <sup>2</sup>                |
| Cross section stranded with ferrule to   | 1.5 mm <sup>2</sup>                |
| Cross-Section                            | 1.5 mm <sup>2</sup>                |
| CSA test standard                        | C22.2 No 158                       |
| CSAus test standard                      | UL 1059                            |
| cUL test standard                        | C22.2 No 158                       |
| Flamklass                                | UL94-V0                            |
| GL test standard                         | IEC 60947-7-1:2009                 |

|                                     |                   |
|-------------------------------------|-------------------|
| Height TS 35/7.5                    | 40.5 mm           |
| Insulation Material                 | Polyamide 6.6     |
| KEMA KEUR test standard             | EN 60947-7-1:2009 |
| Length                              | 82 mm             |
| Mounting                            | TS 35/7,5         |
| Number of levels                    | 1                 |
| Number of test pick off options     | 0                 |
| Operating temperature from          | -40 °C            |
| Operating temperature to            | 120 °C            |
| Overvoltage category                | III               |
| Pack Size                           | 100               |
| Plug gauge acc. EN 60 947-1         | A1                |
| Rated Current CSA                   | 12.5 A            |
| Rated current CSAus                 | 12.5 A            |
| Rated Current IEC                   | 17.5 A            |
| Rated impulse voltage               | 4 kV              |
| Rated wire cross section from (AWG) | 26                |
| Rated wire cross section to (AWG)   | 14                |
| Rated voltage CSAus                 | 300 V             |
| Rated Voltage IEC                   | 400 V             |
| Stripping Length                    | 8 mm              |
| Tariff code                         | 85369010          |
| UL test standard                    | UL 1059           |
| Weight                              | 7.8 g             |
| Width                               | 5.1 mm            |
| Voltage CSA                         | 300 V             |

