


MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3596.2

ZMP 1.5 BG, Base terminal for ZMP 4 way distribution system

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

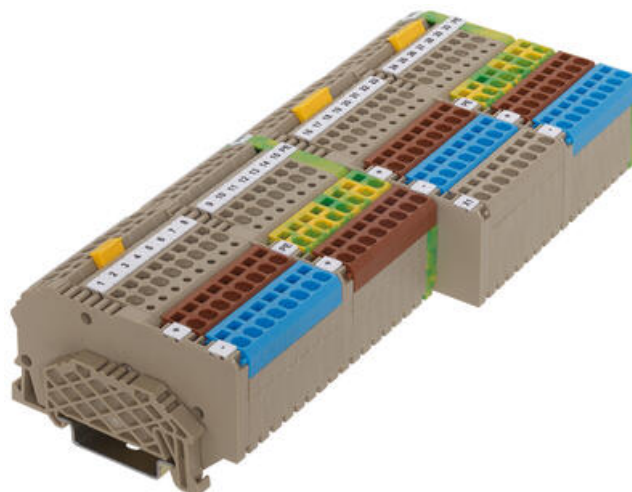

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, CSA US, KEMA KUR, EAC
Color	Beige
Connections	4
Contamination degree	3
Country of origin	CZ
Cross-Section	1.5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	40.5 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	68.7 mm
Mounting	TS 35/7,5
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III

Pack Size	50
Rated Current CSA	12.5 A
Rated current CSAus	12.5 A
Rated Current IEC	17.5 A
Rated Current To UL	12.5 A
Rated impulse voltage	4 kV
Rated voltage CSAus	400 V
Rated Voltage IEC	400 V
Rated Voltage To UL	400 V
Stripping Length	8 mm
Tariff code	85369010
UL test standard	UL 1059
Weight	6.1 g
Width	5.1 mm
Voltage CSA	400 V