


## MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3532.2

ZIZA 1.5/3/PE, 3 wire Base earth terminal with foot

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

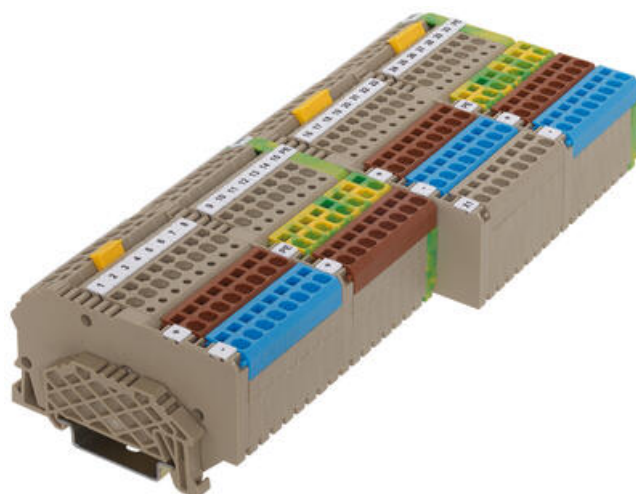

### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                                          |                                        |
|------------------------------------------|----------------------------------------|
| Approvals                                | UL, CSA, GL, CSA US, cUL, KEMA KUR     |
| Color                                    | Green/yellow                           |
| Connections                              | 2                                      |
| Contamination degree                     | 3                                      |
| Country of origin                        | CZ                                     |
| Cross connect channels                   | 0                                      |
| Cross section single wire from           | 0.5 mm <sup>2</sup>                    |
| Cross section single wire to             | 2.5 mm <sup>2</sup>                    |
| Cross section stranded wire from         | 0.5 mm <sup>2</sup>                    |
| Cross section stranded wire to           | 2.5 mm <sup>2</sup>                    |
| Cross section stranded with ferrule from | 0.5 mm <sup>2</sup>                    |
| Cross section stranded with ferrule to   | 1.5 mm <sup>2</sup>                    |
| Cross-Section                            | 1.5 mm <sup>2</sup>                    |
| CSA test standard                        | C22.2 No 158                           |
| CSAus test standard                      | UL 1059                                |
| cUL test standard                        | C22.2 No 158                           |
| Flamklass                                | UL94-V0                                |
| GL test standard                         | IEC 60947-7-1:2009, IEC 60947-7-2:2009 |

|                                            |                                      |
|--------------------------------------------|--------------------------------------|
| <b>Height TS 35/7.5</b>                    | 40.5 mm                              |
| <b>Insulation Material</b>                 | Polyamide 6.6                        |
| <b>KEMA KEUR test standard</b>             | EN 60947-7-1:2009, EN 60947-7-2:2009 |
| <b>Length</b>                              | 68.7 mm                              |
| <b>Mounting</b>                            | TS 35/7,5                            |
| <b>Number of levels</b>                    | 1                                    |
| <b>Number of test pick off options</b>     | 0                                    |
| <b>Operating temperature from</b>          | -40 °C                               |
| <b>Operating temperature to</b>            | 120 °C                               |
| <b>Overvoltage category</b>                | III                                  |
| <b>Pack Size</b>                           | 20                                   |
| <b>Plug gauge acc. EN 60 947-1</b>         | A1                                   |
| <b>Rated wire cross section from (AWG)</b> | 26                                   |
| <b>Rated wire cross section to (AWG)</b>   | 14                                   |
| <b>Stripping Length</b>                    | 8 mm                                 |
| <b>Tariff code</b>                         | 85369010                             |
| <b>UL test standard</b>                    | UL 1059                              |
| <b>Weight</b>                              | 11 g                                 |
| <b>Width</b>                               | 51 mm                                |