


MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3560.2

ZIZA 1.5/4/16/PE, 4 wire, 16 way ZIZA block with earth,
Brown, Blue, Green/Yellow

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

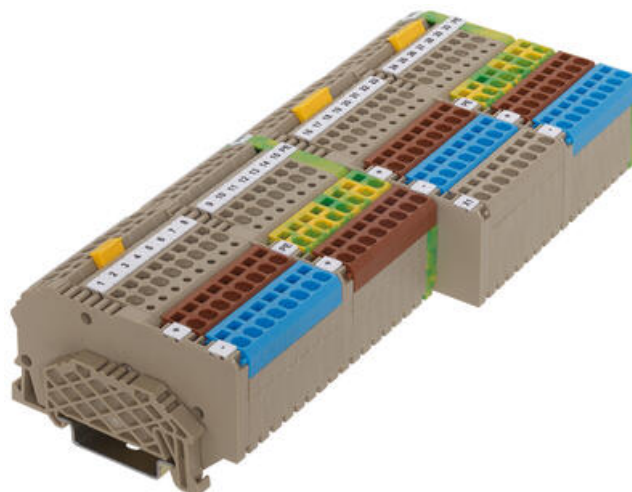

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR
Color	Combination
Connections	5
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0.5 mm ²
Cross section single wire to	2.5 mm ²
Cross section stranded wire from	0.5 mm ²
Cross section stranded wire to	2.5 mm ²
Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	1.5 mm ²
Cross-Section	1.5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
Flamklass	UL94-V0
GL test standard	IEC 60947-7-1:2009, IEC 60947-7-2:2009

Height TS 35/7.5	40.5 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	60947-7-1:2009, EN 60947-7-2:2009
Length	82.5 mm
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	1
Plug gauge acc. EN 60 947-1	A1
Rated Current CSA	12.5 A
Rated current CSAus	12.5 A
Rated Current IEC	17.5 A
Rated impulse voltage	4 kV
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Rated voltage CSAus	300 V
Rated Voltage IEC	400 V
Stripping Length	8 mm
Tariff code	85369010
UL test standard	UL 1059
Weight	7.8 g
Width	91.8 mm
Voltage CSA	300 V