


## DISCONNECT TERMINALS - FTRK 2.5MM<sup>2</sup>

FTRK

3261.2  
FTRK 2,5/2A/ST BG

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

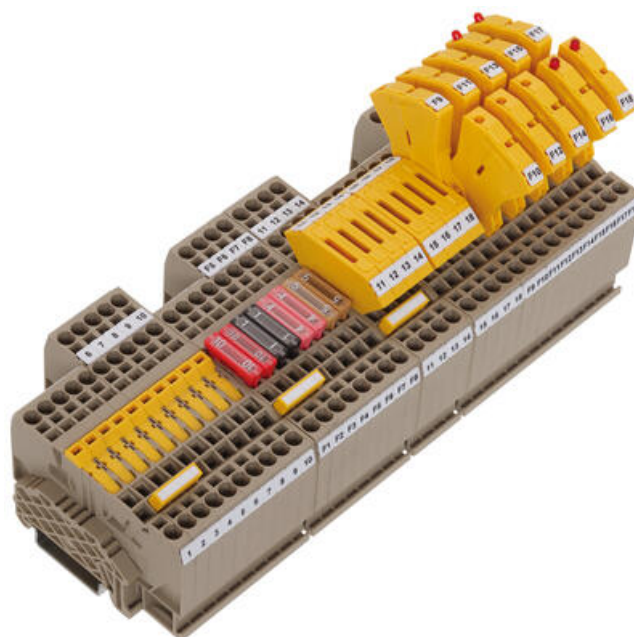

### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                                          |                                            |
|------------------------------------------|--------------------------------------------|
| Additional information                   | with disconnect-plug (ST with wire jumper) |
| Approvals                                | CSA, CSA US, KEMA KUR                      |
| Color                                    | Beige                                      |
| Connections                              | 2                                          |
| Contamination degree                     | 3                                          |
| Country of origin                        | DE                                         |
| Cross connect channels                   | 1                                          |
| Cross section single wire from           | 0.2 mm <sup>2</sup>                        |
| Cross section single wire to             | 4 mm <sup>2</sup>                          |
| Cross section stranded wire from         | 0.2 mm <sup>2</sup>                        |
| Cross section stranded wire to           | 4 mm <sup>2</sup>                          |
| Cross section stranded with ferrule from | 0.2 mm <sup>2</sup>                        |
| Cross section stranded with ferrule to   | 2.5 mm <sup>2</sup>                        |
| Cross-Section                            | 2.5 mm <sup>2</sup>                        |
| CSA test standard                        | C22.2 No 158                               |

|                                            |                                      |
|--------------------------------------------|--------------------------------------|
| <b>CSAus test standard</b>                 | UL 1059                              |
| <b>Flamklass</b>                           | UL94-V0                              |
| <b>Height TS 35/7.5</b>                    | 59.5 mm                              |
| <b>Insulation Material</b>                 | Polyamide 6.6                        |
| <b>KEMA KEUR test standard</b>             | EN 60947-7-1:2009, EN 60947-7-3:2009 |
| <b>Length</b>                              | 67.5 mm                              |
| <b>Mounting</b>                            | TS 35/7,5                            |
| <b>Number of levels</b>                    | 1                                    |
| <b>Operating temperature from</b>          | -40 °C                               |
| <b>Operating temperature to</b>            | 120 °C                               |
| <b>Overvoltage category</b>                | III                                  |
| <b>Pack Size</b>                           | 100                                  |
| <b>Plug gauge acc. EN 60 947-1</b>         | A3                                   |
| <b>Rated Current CSA</b>                   | 15 A                                 |
| <b>Rated current CSAus</b>                 | 15 A                                 |
| <b>Rated Current IEC</b>                   | 18 A                                 |
| <b>Rated impulse voltage</b>               | 6 kV                                 |
| <b>Rated wire cross section from (AWG)</b> | 20                                   |
| <b>Rated wire cross section to (AWG)</b>   | 12                                   |
| <b>Rated voltage CSAus</b>                 | 300 V                                |
| <b>Rated Voltage IEC</b>                   | 400 V                                |
| <b>Stripping Length</b>                    | 10 mm                                |
| <b>Tariff code</b>                         | 85369010                             |
| <b>Weight</b>                              | 19.9 g                               |
| <b>Width</b>                               | 5.1 mm                               |
| <b>Voltage CSA</b>                         | 300 V                                |

