


DISCONNECT TERMINALS - FTRK 2.5MM²

FTRK

3261.5

FTRK 2,5/2A/ST BU

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

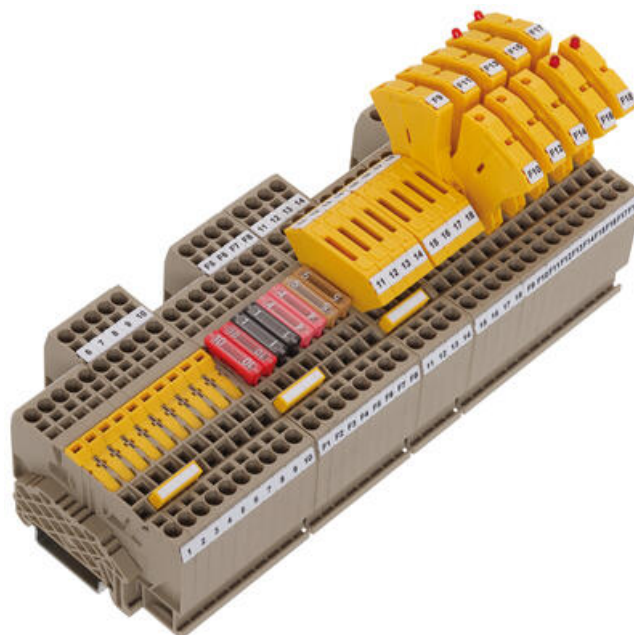

PRODUCT DESCRIPTION

SPECIFICATIONS

Additional information	with disconnect-plug (ST with wire jumper)
Approvals	CSA, CSA US, KEMA KUR
Color	Blue
Connections	2
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	2.5 mm ²
CSA test standard	C22.2 No 158

CSAus test standard	UL 1059
Flamklass	UL94-V0
Height TS 35/7.5	59.5 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009, EN 60947-7-3:2009
Length	67.5 mm
Mounting	TS 35/7,5
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	15 A
Rated current CSAus	15 A
Rated Current IEC	18 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Rated voltage CSAus	300 V
Rated Voltage IEC	400 V
Stripping Length	10 mm
Tariff code	85369010
Weight	19.9 g
Width	5.1 mm
Voltage CSA	300 V

