


## PRESSURE SPRING DOUBLE/TRIPLE DECK TERMINALS FRKD

FRKD, FSLD,

3226.1  
FRKD 2.5 Green, 2.5mm<sup>2</sup> Push-in double deck

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

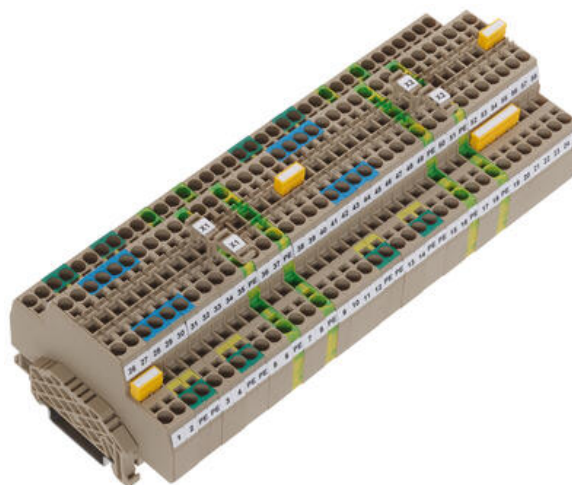

### PRODUCT DESCRIPTION

## SPECIFICATIONS

|   |                            |
|---|----------------------------|
| <b>Approvals</b>                                | CSA, CSA US, KEMA KUR, EAC |
| <b>Color</b>                                    | Green                      |
| <b>Connections</b>                              | 2 x 2                      |
| <b>Contamination degree</b>                     | 3                          |
| <b>Country of origin</b>                        | BG                         |
| <b>Cross connect channels</b>                   | 2                          |
| <b>Cross section single wire from</b>           | 0.2 mm <sup>2</sup>        |
| <b>Cross section single wire to</b>             | 4 mm <sup>2</sup>          |
| <b>Cross section stranded wire from</b>         | 0.2 mm <sup>2</sup>        |
| <b>Cross section stranded wire to</b>           | 4 mm <sup>2</sup>          |
| <b>Cross section stranded with ferrule from</b> | 0.2 mm <sup>2</sup>        |
| <b>Cross section stranded with ferrule to</b>   | 2.5 mm <sup>2</sup>        |
| <b>Cross-Section</b>                            | 2.5 mm <sup>2</sup>        |
| <b>CSA test standard</b>                        | C22.2 No 158               |
| <b>CSAus test standard</b>                      | UL 1059                    |
| <b>EAC test standard</b>                        | TR ZU 004/2011             |
| <b>Flamklass</b>                                | UL94-V0                    |
| <b>Height TS 35/7.5</b>                         | 53 mm                      |

|  |                   |
|--|-------------------|
| <b>Insulation Material</b>                 | Polyamide 6.6     |
| <b>KEMA KEUR test standard</b>             | EN 60947-7-1:2009 |
| <b>Length</b>                              | 75.4 mm           |
| <b>Mounting</b>                            | TS 35/7,5         |
| <b>Number of levels</b>                    | 2                 |
| <b>Operating temperature from</b>          | -40 °C            |
| <b>Operating temperature to</b>            | 120 °C            |
| <b>Overvoltage category</b>                | III               |
| <b>Pack Size</b>                           | 100               |
| <b>Plug gauge acc. EN 60 947-1</b>         | A3                |
| <b>Rated Current CSA</b>                   | 20 A              |
| <b>Rated current CSAus</b>                 | 20 A              |
| <b>Rated Current IEC</b>                   | 24 A              |
| <b>Rated impulse voltage</b>               | 6 kV              |
| <b>Rated wire cross section from (AWG)</b> | 26                |
| <b>Rated wire cross section to (AWG)</b>   | 14                |
| <b>Rated voltage CSAus</b>                 | 300 V             |
| <b>Rated Voltage IEC</b>                   | 500 V             |
| <b>Stripping Length</b>                    | 12 mm             |
| <b>Tariff code</b>                         | 85369010          |
| <b>Weight</b>                              | 14.57 g           |
| <b>Width</b>                               | 5.1 mm            |
| <b>Voltage CSA</b>                         | 300 V             |

