


## PRESSURE SPRING DOUBLE/TRIPLE DECK TERMINALS FRKD

FRKD, FSLD,

3226.1  
FRKD 2.5 Green, 2.5mm<sup>2</sup> Push-in double deck

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

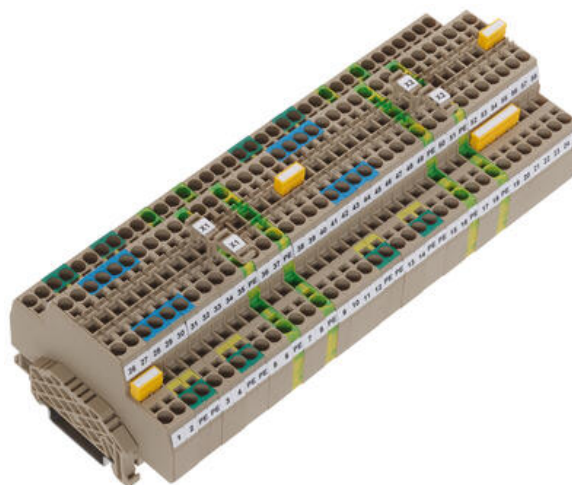

### PRODUCT DESCRIPTION

## SPECIFICATIONS

<b>Approvals</b>	CSA, CSA US, KEMA KUR, EAC
<b>Color</b>	Green
<b>Connections</b>	2 x 2
<b>Contamination degree</b>	3
<b>Country of origin</b>	BG
<b>Cross connect channels</b>	2
<b>Cross section single wire from</b>	0.2 mm <sup>2</sup>
<b>Cross section single wire to</b>	4 mm <sup>2</sup>
<b>Cross section stranded wire from</b>	0.2 mm <sup>2</sup>
<b>Cross section stranded wire to</b>	4 mm <sup>2</sup>
<b>Cross section stranded with ferrule from</b>	0.2 mm <sup>2</sup>
<b>Cross section stranded with ferrule to</b>	2.5 mm <sup>2</sup>
<b>Cross-Section</b>	2.5 mm <sup>2</sup>
<b>CSA test standard</b>	C22.2 No 158
<b>CSAus test standard</b>	UL 1059
<b>EAC test standard</b>	TR ZU 004/2011
<b>Flamklass</b>	UL94-V0
<b>Height TS 35/7.5</b>	53 mm

<b>Insulation Material</b>	Polyamide 6.6
<b>KEMA KEUR test standard</b>	EN 60947-7-1:2009
<b>Length</b>	75.4 mm
<b>Mounting</b>	TS 35/7,5
<b>Number of levels</b>	2
<b>Operating temperature from</b>	-40 °C
<b>Operating temperature to</b>	120 °C
<b>Overvoltage category</b>	III
<b>Pack Size</b>	100
<b>Plug gauge acc. EN 60 947-1</b>	A3
<b>Rated Current CSA</b>	20 A
<b>Rated current CSAus</b>	20 A
<b>Rated Current IEC</b>	24 A
<b>Rated impulse voltage</b>	6 kV
<b>Rated voltage CSAus</b>	300 V
<b>Rated Voltage IEC</b>	500 V
<b>Rated wire cross section from (AWG)</b>	26
<b>Rated wire cross section to (AWG)</b>	14
<b>Stripping Length</b>	12 mm
<b>Tariff code</b>	85369010
<b>Voltage CSA</b>	300 V
<b>Weight</b>	14.57 g
<b>Width</b>	5.1 mm

