


PRESSURE SPRING DOUBLE/TRIPLE DECK TERMINALS FRKD

FRKD, FSLD,

3227.8

FRKD 2.5/SV Yellow, 2.5mm² Push-in linked double deck

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

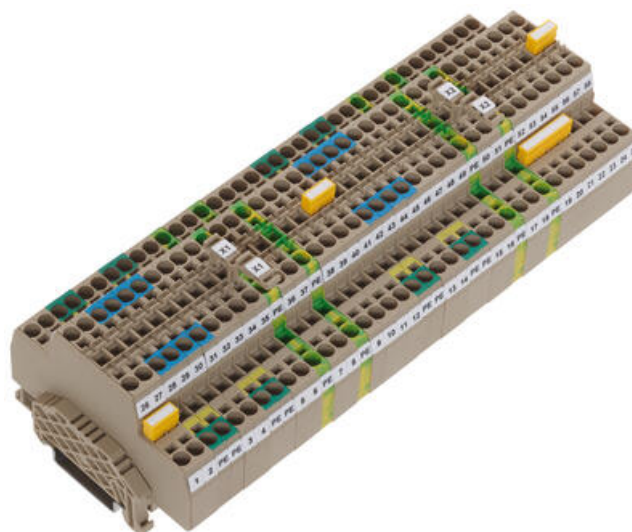

PRODUCT DESCRIPTION

SPECIFICATIONS

Additional information	connected vertically
Approvals	CSA, CSA US, KEMA KUR, EAC
Color	Yellow
Connections	4
Contamination degree	3
Country of origin	BG
Cross connect channels	2
Cross section single wire from	0.2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	4 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	2.5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011

Flamklass	UL94-V0
Height TS 35/7.5	53 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	75.4 mm
Mounting	TS 35/7,5
Number of levels	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	20 A
Rated current CSAus	20 A
Rated Current IEC	24 A
Rated impulse voltage	6 kV
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Rated voltage CSAus	300 V
Rated Voltage IEC	500 V
Stripping Length	12 mm
Tariff code	85369010
Weight	14.97 g
Width	5.1 mm
Voltage CSA	300 V

