


FEED THROUGH TERMINALS - ZRK 2.5-16 MM²

ZRK

3500.1
ZRK 2.5/2A Green, 2.5mm² Tension spring, feed through

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

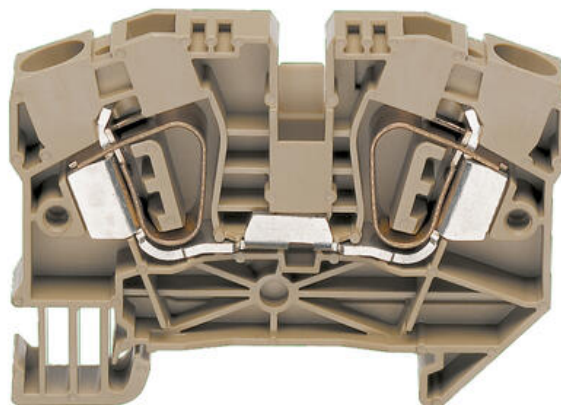

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, KEMA KUR, EAC
Color	Green
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	2
Cross section single wire from	0.5 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0.5 mm ²
Cross section stranded wire to	4 mm ²

Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	2.5 mm ²
Cross-Section	2.5 mm ²
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
GL test standard	IEC 60947-7-1:2009
Height TS 35/7.5	39 mm
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	59 mm
Mounting	TS 35/7,5
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40 °C
Operating temperature to	120 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	27 A
Rated current CSAus	27 A
Rated Current IEC	24 A
Rated Current To UL	27 A
Rated impulse voltage	8 kV
Rated voltage CSAus	600 V
Rated Voltage IEC	800 V
Rated Voltage To UL	600 V
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Stripping Length	10 mm
Tariff code	85369010
Type of terminal	Tension Spring
UL test standard	UL 1059

Voltage CSA	600 V
Weight	7.6 g
Width	5.1 mm

