


## MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1058.2

SLN2.5/35, 2.5mm<sup>2</sup> Compact Earth, clamped

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm<sup>2</sup> cables
- cross connectable
- Polyimide 6.6-V2

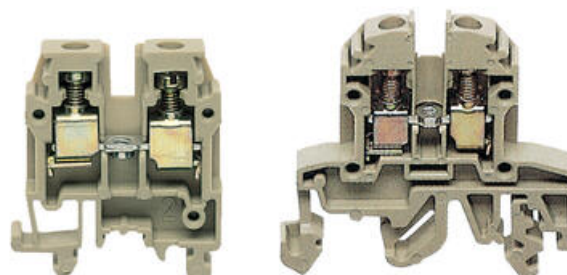

### PRODUCT DESCRIPTION

This mixed range of compact terminals is ideal for applications where space is at a premium.

The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail.

Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

### SPECIFICATIONS

Approvals	UL, cUL, NEMKO, EAC
Color	Green/yellow
Connections	2
Contamination degree	3
Country of origin	CZ
Cross section single wire from	0.2 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0.2 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0.2 mm <sup>2</sup>
Cross section stranded with ferrule to	2.5 mm <sup>2</sup>
Cross-Section	2.5 mm <sup>2</sup>
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V2

Height TS 35/7.5	38.9 mm
Insulation Material	Polyamide 6.6
Length	52 mm
Mounting	TS 35/7,5
Nemko test standard	EN 60947-7-2:2002
Number of levels	1
Operating temperature from	-40 °C
Operating temperature to	105 °C
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Screw size	M 2,5
Screw type	Slotted
Stripping Length	10 mm
Tariff code	85369010
Torque max	0.8
Torque Min	0.4
UL test standard	UL 1059
Weight	16.9 g
Width	6 mm

