


## MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1010.2

RK1.5 4/15 Beige, 4mm<sup>2</sup> Miniature feed through, TS15

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm<sup>2</sup> cables
- cross connectable
- Polyimide 6.6-V2

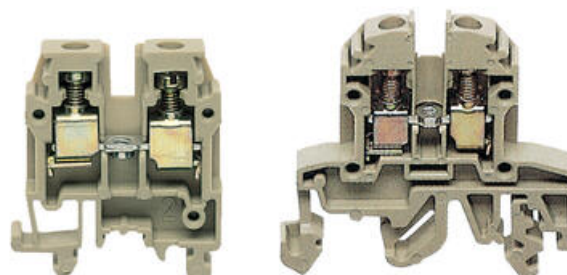

### PRODUCT DESCRIPTION

This mixed range of compact terminals is ideal for applications where space is at a premium.

The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail.

Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

### SPECIFICATIONS

Approvals	UL, CSA, GL, KEMA KUR, EAC
Color	Beige
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0.2 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0.2 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0.2 mm <sup>2</sup>
Cross section stranded with ferrule to	4 mm <sup>2</sup>
Cross-Section	4 mm <sup>2</sup>
CSA test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

<b>Flamklass</b>	UL94-V2
<b>GL test standard</b>	IEC 60947-7-1:2002
<b>Height TS 15/5.5</b>	34.5 mm
<b>Insulation Material</b>	Polyamide 6.6
<b>KEMA KEUR test standard</b>	EN 60947-7-1:2009
<b>Length</b>	27 mm
<b>Mounting</b>	TS 15/5,5
<b>Number of levels</b>	1
<b>Number of test pick off options</b>	2
<b>Operating temperature from</b>	-40 °C
<b>Operating temperature to</b>	105 °C
<b>Overvoltage category</b>	III
<b>Pack Size</b>	100
<b>Plug gauge acc. EN 60 947-1</b>	A4
<b>Rated Current CSA</b>	40 A
<b>Rated Current IEC</b>	32 A
<b>Rated impulse voltage</b>	6 kV
<b>Rated wire cross section from (AWG)</b>	22
<b>Rated wire cross section to (AWG)</b>	10
<b>Rated Voltage IEC</b>	500 V
<b>Screw size</b>	M 3
<b>Screw type</b>	Slotted
<b>Stripping Length</b>	9 mm
<b>Tariff code</b>	85369010
<b>Torque max</b>	1
<b>Torque Min</b>	0.5
<b>UL test standard</b>	UL 1059
<b>Weight</b>	5.64 g
<b>Width</b>	6 mm
<b>Voltage CSA</b>	300 V

