



LI-M/LI-P METAL CONNECTOR

5010.010.013

LI-P AD19 PG13,5 straight connector

- Nickeled brass
- Turnable
- For example SPR-PVC-AS conduit



PRODUCT DESCRIPTION




LI-M and LI-P connectors are made of nickled brass. IP40 rated, good resistance against vibration.

LI connector installed on SPR-PVC-AS conduit in the picture below.



SPECIFICATIONS

Hose Dimension AD	19
Thread	PG 13,5
Pack Size	50
IP Class	IP40
Temperature range from	-40 °C
Temperature range to	250 °C
Weight kg / 100 ± 10%	3.56
Material	Nickel-plated brass
Type	LI-P

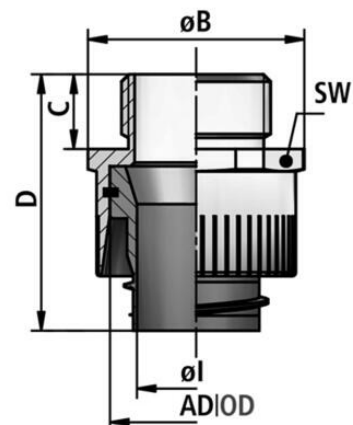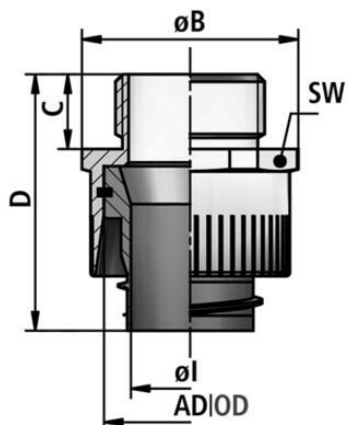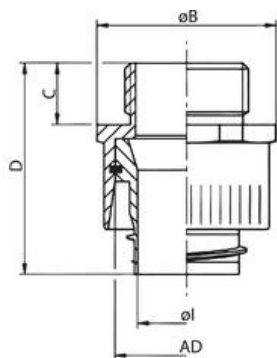

LI-P					
IP40					
	I mm	B mm	C mm	D mm	SW mm
5010.010.009	9,0	21,0	7,0	30,0	19
5010.010.011	12,0	25,0	7,0	30,0	23
5010.010.013	13,5	27,0	7,0	30,0	25
5010.010.016	15,5	29,0	7,0	32,0	27
5010.010.021	20,5	37,0	10,0	35,0	34
5010.010.029	27,5	46,0	10,0	40,0	43
5010.010.036	36,5	58,0	10,0	40,0	55
5010.010.048	47,0	68,0	10,0	40,0	66