

LKI-M/LKI-P PLASTIC CONNECTOR

5020.014.016

LKI-M AD14 M20 connector grey



- Metric or PG thread
- One-part
- IP54 rated




PRODUCT DESCRIPTION

LKI-M/LKI-P plastic connectors are suitable for use with AIRFLEX -series conduits. Also available in smaller quantities than listed below.


SPECIFICATIONS

Diameter	14 mm
Thread	M16x1,5 met. EN 60423
Pack Size	50
IP Class	IP54
Approvals	CSA 22.2, cRUus
Temperature range from	-10 °C
Temperature range to	110 °C
Weight kg / 100 ± 10%	0.38
Material	Polypropylene
Type	LKI-M
Fits to	AIRFLEX KUW-PU-AS, AIRFLEX KUW-PVZ-AS

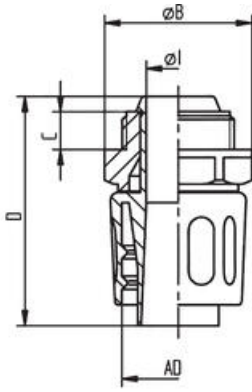


LKI-M

IP54	\varnothing	l mm	B mm	C mm	D mm
5020.014.016	14	9,5	21,0	10,0	39,5
5020.014.020	17	11,5	24,5	10,0	42,0
5020.014.025	21	14,5	30,0	11,0	48,0
5020.014.032	27	19,5	39,0	12,0	58,0
5020.014.040	36	27,0	50,0	12,0	59,0
5020.014.050	45	35,5	59,5	12,0	62,5
5020.014.063	56	46,0	71,5	15,0	68,0

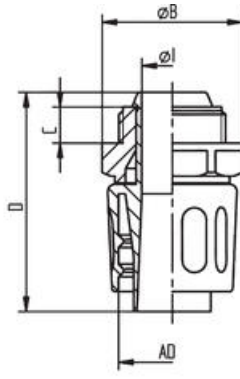


LKI-P

IP54	\varnothing	l mm	B mm	C mm	D mm
5020.010.009	14	9,5	21,0	10,0	39,5
5020.010.011	17	11,5	24,5	10,0	42,0
5020.010.013	19	13,0	26,5	10,0	42,0
5020.010.016	21	14,5	30,0	11,0	48,0
5020.010.021	27	19,5	39,0	11,0	58,0
5020.010.029	36	27,0	50,0	12,0	59,0
5020.010.036	45	35,5	59,5	12,0	62,5
5020.010.048	56	46,0	71,5	15,0	68,0

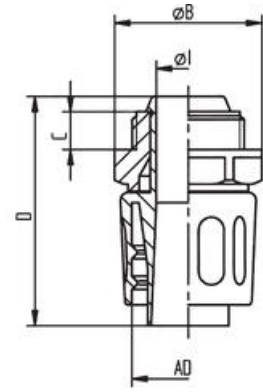

LKI-M

IP54	\varnothing	l mm	B mm	C mm	D mm
5020.014.016	14	9,5	21,0	10,0	39,5
5020.014.020	17	11,5	24,5	10,0	42,0
5020.014.025	21	14,5	30,0	11,0	48,0
5020.014.032	27	19,5	39,0	12,0	58,0
5020.014.040	36	27,0	50,0	12,0	59,0
5020.014.050	45	35,5	59,5	12,0	62,5
5020.014.063	56	46,0	71,5	15,0	68,0

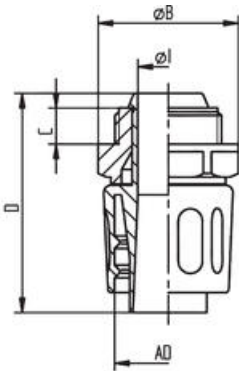

LKI-P

IP54	\varnothing	l mm	B mm	C mm	D mm
5020.010.009	14	9,5	21,0	10,0	39,5
5020.010.011	17	11,5	24,5	10,0	42,0
5020.010.013	19	13,0	26,5	10,0	42,0
5020.010.016	21	14,5	30,0	11,0	48,0
5020.010.021	27	19,5	39,0	11,0	58,0
5020.010.029	36	27,0	50,0	12,0	59,0
5020.010.036	45	35,5	59,5	12,0	62,5
5020.010.048	56	46,0	71,5	15,0	68,0