


LIQUID-TIGHT-EF PROTECTIVE METAL CONDUIT

2080.111.010

LIQUID-TIGHT-EF AD 5/16" grey

- Conduit made from galvanized steel, PVC sheathing
- Liquid-tight
- Resistant against chemicals and oils
- Flame-resistant
- IP68 rated

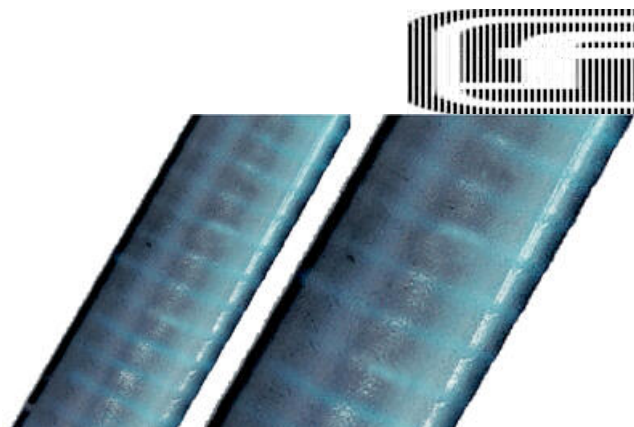

PRODUCT DESCRIPTION

LIQUID-TIGHT-EF is a protective metal conduit made from galvanized steel, covered with a PVC sheathing. Suitable for use in various applications where liquid-tight construct is required. IP68 rated.

Examples of use include electrical installations in automation, machinery and equipment and automotive industry.

Profile



SPECIFICATIONS

Diameter	5/16"
Dimensional Inner	10 mm
Dimensional Outer	14.5 mm
Pack size	50 m
Approvals	VDE
Color	Grey
Bending Radius -10% Static	105
Bending Radius -10% Dynamic	265
Temperature range from	-25 °C

Temperature range to	90 °C
----------------------	-------

Weight / M	0.14
------------	------

