


ROHRFLEX® PA 6 PROTECTIVE CONDUIT

0233.202.006


Plastic tube-PA6 AD 10,0 Black

- Polyamide conduit for mechanical engineering
- Flexible material
- Halogen-free, flame retardant
- UV-resistant

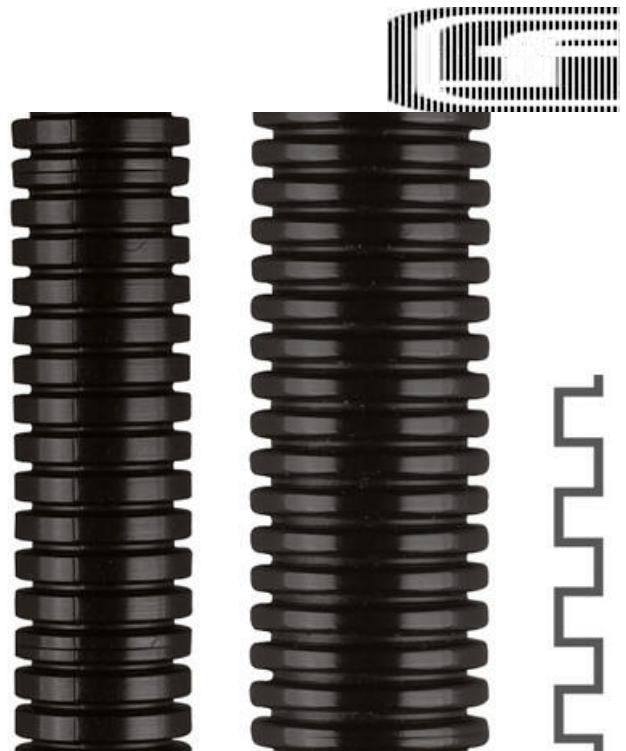

PRODUCT DESCRIPTION

ROHRflex PA 6 is a highly versatile conduit for various industries. Both internally and externally corrugated. Oil resistant up to +80 °C, also resistant against acids and solvents. Applications include machine building, vehicles and electrical installations.

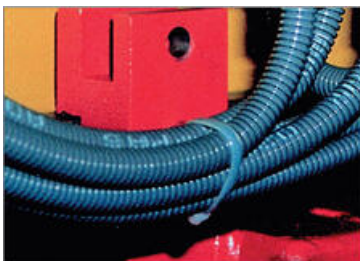

Supplied in full packages.

SPECIFICATIONS

Hose Dimension AD	10
Dimensional Inner	6.5 mm
Dimensional Outer	10 mm
Pack size	50 m
Approvals	CE, CSA US, DNV, Lloyd's, RU, UL, VDE
Color	Black
Bending Radius -10% Static	13
Bending Radius -10% Dynamic	35

Fire Rating	UL94-VO
Temperature range from	-40 °C
Temperature range to	120 °C
Weight / M	0.02
Material	Polyamide
Type	ROHRFLEX PA6

