

## POLYESTER ENCLOSURES

4330000

Polyester enclosure CP-330, 560x160x91 mm

- Glass fiber reinforced
- Suitable for demanding environments
- Shock resistant
- High protection, IP65 rated



### PRODUCT DESCRIPTION

Bernstein CPG and CPS enclosure ranges are manufactured from high-grade glass fibre-reinforced polyester and available in both grey (RAL7000) and black (RAL9005).


Glass reinforced polyester enclosures of very high corrosion resistance and UL94/V0 flammability rating.

### SPECIFICATIONS

<b>Width</b>	560 mm
<b>Height</b>	160 mm
<b>Depth</b>	91 mm
<b>IP Class</b>	IP66
<b>Approvals</b>	GL, UL
<b>Temperature range from</b>	-40 °C
<b>Temperature range to</b>	80 °C
<b>Color</b>	Grey RAL 7000
<b>Material</b>	Polyester

#### Enclosure incl. seals

Seal material	Temperature range	Seal material	Temperature range
PUR seal (Standard)	-40°C to +100°C	PUR seal	-40°C to +100°C
Chloride	-20°C to +80°C	Chloride	-20°C to +80°C
Silicone foam seal	-40°C to +180°C	Silicone foam seal	-40°C to +180°C
Silicone full seal	-40°C to +180°C	Silicone full seal	-40°C to +180°C
EPDM seal	-25°C to +150°C	EPDM seal	-25°C to +150°C
HFVAC seal	-40°C to +125°C	HFVAC seal	-40°C to +125°C

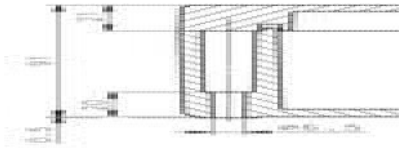

Enclosure incl. seals		
PU seal (standard)	-40°C to +100°C	-40°C to +100°C
CR seal	-30°C to +80°C	-30°C to +80°C
Silicone fluoro seal	-40°C to +180°C	-40°C to +180°C
Silicone fluoro seal	-40°C to +180°C	-40°C to +180°C
EPDM seal	-25°C to +100°C	-25°C to +100°C
NBR seal	-40°C to +120°C	-40°C to +120°C

