


CONTROL ENCLOSURE CC-5000

CC-5000 OHJAUSKOTELO
Customizable enclosure

- Customisable dimensions
- Extruded aluminium frame sections
- Rugged industrial design
- RAL9006
- High protection, IP65 rated

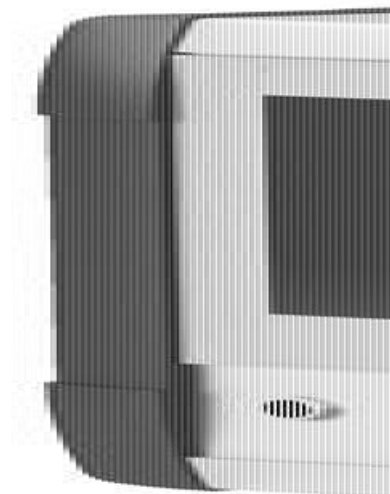






PRODUCT DESCRIPTION

Custom versions can be supplied to meet individual customer specifications. The product features:

- Innovative and modern industrial design
- Rounded edges, no risk of physical injury
- High-quality extruded aluminium sections (naturally anodised)
- Customised colours from RAL range
- Single-walled sections that provide outstanding heat dissipation
- Integrated recessed grips for simple handling
- Protection class IP65
- Operating temperature -30 °C to +80 °C
- Internally mounted front panel
- Door configurations for direct access to the interior
- Slimline design for configuring flat screen systems

SPECIFICATIONS

IP Class	IP65
Temperature range from	-30 °C
Temperature range to	80 °C
Color	Grey
Material	Aluminium

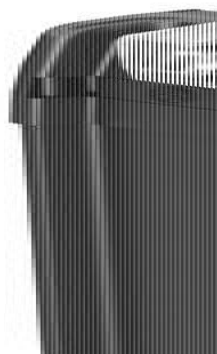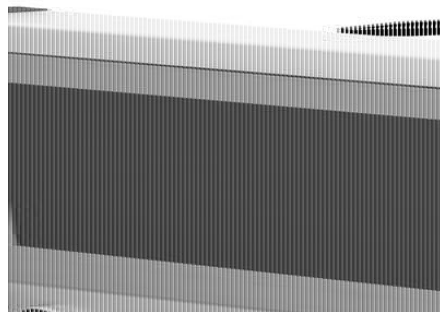

Basis sections	External depth	Installation depth
	75 mm	53 mm
	125 mm	103 mm
	185 mm	163 mm
Section combinations	External depth	Installation depth
	150 mm (75 + 75)	114 mm
	200 mm (75 + 125 or 125 + 75)	164 mm
	250 mm (125 + 125)	214 mm
	260 mm (75 + 185 or 185 + 75)	224 mm
	310 mm (125 + 185 or 185 + 125)	274 mm
	370 mm (185 + 185)	334 mm

Basis sections	External depth	Installation depth
	75 mm	53 mm
	125 mm	103 mm
	185 mm	163 mm
Section combinations	External depth	Installation depth
	150 mm (75 + 75)	114 mm
	200 mm (75 + 125 or 125 + 75)	164 mm
	250 mm (125 + 125)	214 mm
	260 mm (75 + 185 or 185 + 75)	224 mm
	310 mm (125 + 185 or 185 + 125)	274 mm
	370 mm (185 + 185)	334 mm