

ALUMINIUM ENCLOSURES

1170000

Alu Enclosure CA 170 STD.SKRUV

- Robust and shock resistant design
- Durable neoprene seal
- High protection, IP65 rated




PRODUCT DESCRIPTION

SPECIFICATIONS

Width	175 mm
Height	80 mm
Depth	57 mm
IP Class	IP66
Temperature range from	-40 °C
Temperature range to	80 °C
Color	Grey RAL 7001
Lid	Grey
Material	Aluminium

Enclosure incl. seals		
PUR seal (standard)	-30°C to +80°C	with standard coating
CR seal	-30°C to +80°C	with standard coating possible
Silicone foam seal	-60°C to +130°C	without standard coating possible
Silicone full seal	-60°C to +200°C	without standard coating possible
EPDM seal	-35°C to +100°C	without standard coating possible
HF/EMC seal	-55°C to +125°C	without standard coating possible

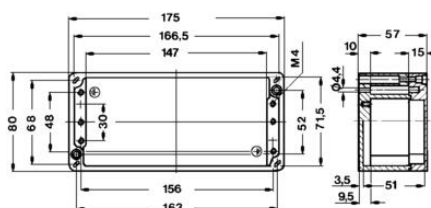

Enclosure incl. seals		
PUR seal (standard)	-30°C to +80°C	with standard coating
CR seal	-30°C to +80°C	with standard coating possible
Silicone foam seal	-60°C to +130°C	without standard coating possible
Silicone full seal	-60°C to +200°C	without standard coating possible
EPDM seal	-35°C to +100°C	without standard coating possible
HF/EMC seal	-55°C to +125°C	without standard coating possible

