

## ABS / POLYCARBONATE ENCLOSURES

2520000

PC-EnclosureCT521 (65X50X35)

- Stainless steel quarter turn lid screws
- Halogen-free
- Available with transparent cover
- High protection, IP65 rated




### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                        |               |
|------------------------|---------------|
| Width                  | 65 mm         |
| Height                 | 50 mm         |
| Depth                  | 35 mm         |
| IP Class               | IP66          |
| Temperature range from | -40 °C        |
| Temperature range to   | 80 °C         |
| Color                  | Grey RAL 7035 |
| Lid                    | Grey          |
| Material               | Polycarbonate |

#### Enclosure incl. seals

|                     |                 |                |
|---------------------|-----------------|----------------|
| PUR-Seal (Standard) | -40°C to +100°C | -40°C to +80°C |
| CR-seal             | -30°C to +80°C  | -30°C to +80°C |
| Silicone foam seal  | -40°C to +100°C | -40°C to +80°C |
| Silicone full seal  | -40°C to +100°C | -40°C to +80°C |
| EPDM-seal           | -35°C to +100°C | -35°C to +80°C |
| HF/EMC-seal         | -40°C to +100°C | -40°C to +80°C |

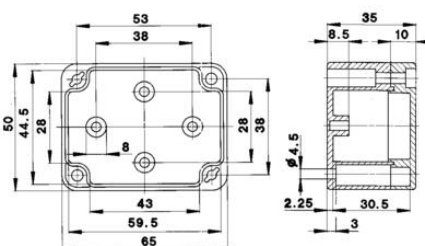

#### Enclosure incl. seals

|                     |                 |                |
|---------------------|-----------------|----------------|
| PUR-Seal (Standard) | -40°C to +100°C | -40°C to +80°C |
| CR-seal             | -30°C to +80°C  | -30°C to +80°C |
| Silicone foam seal  | -40°C to +100°C | -40°C to +80°C |
| Silicone full seal  | -40°C to +100°C | -40°C to +80°C |
| EPDM-seal           | -35°C to +100°C | -35°C to +80°C |
| HF/EMC-seal         | -40°C to +100°C | -40°C to +80°C |

