

## ALUMINIUM ENCLOSURES

1290000

Alu Enclosure CA290 (260X160X90)

- Robust and shock resistant design
- Durable neoprene seal
- High protection, IP65 rated




### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                        |               |
|------------------------|---------------|
| Width                  | 260 mm        |
| Height                 | 160 mm        |
| Depth                  | 90 mm         |
| IP Class               | IP66          |
| Temperature range from | -40 °C        |
| Temperature range to   | 80 °C         |
| Color                  | Grey RAL 7001 |
| Lid                    | Grey          |
| Material               | Aluminium     |

| Enclosure incl. seals |                 |                                   |
|-----------------------|-----------------|-----------------------------------|
| PUR seal (standard)   | -30°C to +80°C  | with standard coating             |
| CR seal               | -30°C to +80°C  | with standard coating possible    |
| Silicone foam seal    | -60°C to +130°C | without standard coating possible |
| Silicone full seal    | -60°C to +200°C | without standard coating possible |
| EPDM seal             | -35°C to +100°C | without standard coating possible |
| HF/EMC seal           | -55°C to +125°C | without standard coating possible |

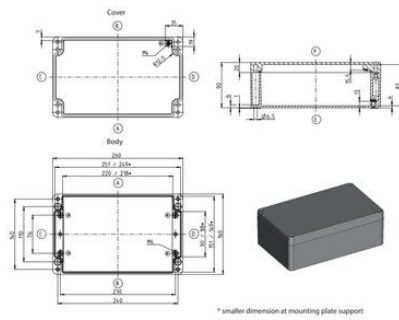

\* smaller dimension at mounting plate support

| Enclosure incl. seals |                 |                                   |
|-----------------------|-----------------|-----------------------------------|
| PUR seal (standard)   | -30°C to +80°C  | with standard coating             |
| CR seal               | -30°C to +80°C  | with standard coating possible    |
| Silicone foam seal    | -60°C to +130°C | without standard coating possible |
| Silicone full seal    | -60°C to +200°C | without standard coating possible |
| EPDM seal             | -35°C to +100°C | without standard coating possible |
| HT/EMC seal           | -55°C to +125°C | without standard coating possible |