NH FUSE-LINKS NH2, GG

500 V AC, 690 V AC

NH2GG50V25
Blade fuse 25A 500V SIZE 2



- Size 2
- Silver-plated copper contacts
- Ceramic body
- Breaking capacity 80/120 kA

PRODUCT DESCRIPTION

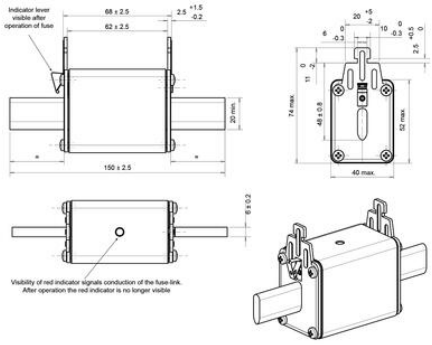
Mersen/Ferraz Shawmut gG type NH fuses are suitable for protecting cables and various appliances. Full range breaking capacity, provide protection against very high short-circuit currents.

Characteristics

- Dimensions according to DIN 43 620 Parts 1 to 4
- Isolated metal gripping slugs
- Double indicator
- Lead-free connectors
- 0% cadmium

SPECIFICATIONS

Approvals	BV, CB, CE, DNV, KEMA KEUR, Lloyd´s, VDE
Breaking Capacity	120 kA
Characteristic (CVL)	gG
Indication (CVL)	Visual, Striker
Manufacturer Part No	N200802
Nominal current	25 A
Pack Size	3
Voltage AC max	500 V
Voltage DC max	250 V


Indicator lever visible after operation of fuse
68 ± 2.5
62 ± 2.5
2.5 +1.5 -0.2
20 mm
150 ± 2.5
20 +5 -2
6 0 -0.3
10 0 -0.3
2.5 +0.5 0
11 0 -0.2
74 max.
48 ± 0.8
52 max.
40 max.
8 ± 0.2
Visibility of red indicator signals conduction of the fuse-link.
After operation the red indicator is no longer visible