

## NH FUSE-LINKS NH3, GG

500 V AC, 690 V AC

NH3GG50V315

Blade fuse 315A 500V SIZE 3

- Size 3
- Silver-plated copper contacts
- Ceramic body
- Breaking capacity 80/120 kA



### PRODUCT DESCRIPTION



Mersen/Ferraz Shawmut gG type NH fuses are suitable for protecting cables and various appliances. Full range breaking capacity, provide protection against very high short-circuit currents.

#### Characteristics

- Dimensions according to DIN 43 620 Parts 1 to 4
- Isolated metal gripping slugs
- Double indicator
- Lead-free connectors
- 0% cadmium

### SPECIFICATIONS

|                             |                                          |
|-----------------------------|------------------------------------------|
| <b>Approvals</b>            | BV, CB, CE, DNV, KEMA KEUR, Lloyd's, VDE |
| <b>Breaking Capacity</b>    | 120 kA                                   |
| <b>Characteristic (CVL)</b> | gG                                       |
| <b>Indication (CVL)</b>     | Visual, Striker                          |
| <b>Manufacturer Part No</b> | L213151                                  |
| <b>Nominal current</b>      | 315 A                                    |
| <b>Pack Size</b>            | 1                                        |
| <b>Voltage AC max</b>       | 500 V                                    |
| <b>Voltage DC max</b>       | 250 V                                    |

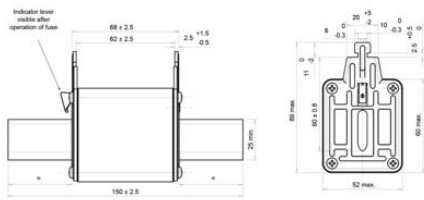

Visibility of red indicator signals conduction of the fuse link.  
After operation the red indicator is no longer visible

