NH FUSE-LINKS NH000, AM

500 V AC, 690 V AC

NH000AM50V2
NH fuse-link NH000 aM 500 V 2 A



- Size 000
- Silver-plated copper contacts
- Ceramic body
- Breaking capacity 80/120 kA

PRODUCT DESCRIPTION

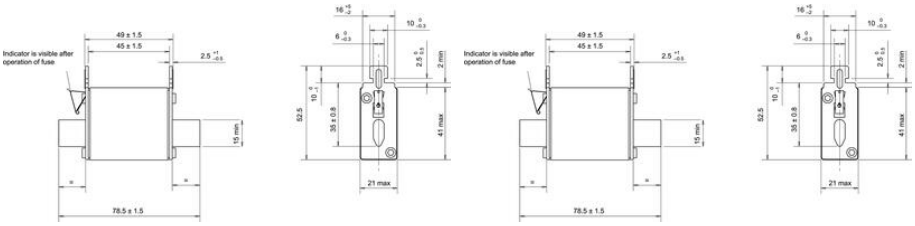
Mersen/Ferraz Shawmut gG type NH fuses are suitable for protecting motor circuits. Partial range breaking capacity. Suitable for short-circuit protection only, interrupts current from 6,3 x In up to maximum breaking capacity. They must be associated with other switchgear for protection against overloads. These fuse-links can have a rated current equal to the motor's nominal current.

Characteristics

- Dimensions according to DIN 43 620 Parts 1 to 4
- Non-Isolated metal gripping slugs
- Double indicator
- Lead-free connectors
- 0% cadmium

SPECIFICATIONS

Approvals	BV, CB, CE, DNV, KEMA KEUR, Lloyd´s, VDE
Breaking Capacity	120 kA
Characteristic (CVL)	aM
Indication (CVL)	Visual, Striker
Manufacturer Part No	K232493
Nominal current	2 A
Pack Size	3
Voltage AC max	500 V


Indicator is visible after operation of fuse
49 ± 1.5
45 ± 1.5
15 min
78.5 ± 1.5
52.5
35 ± 0.8
41 max
21 max
2 min