NH FUSE-LINKS NH00, AM

500 V AC, 690 V AC

NH00AM50V100
NH fuse-link NH00 aM 500 V 100 A



- Size 00
- Silver-plated copper contacts
- Ceramic body
- Breaking capacity 80 kA

PRODUCT DESCRIPTION

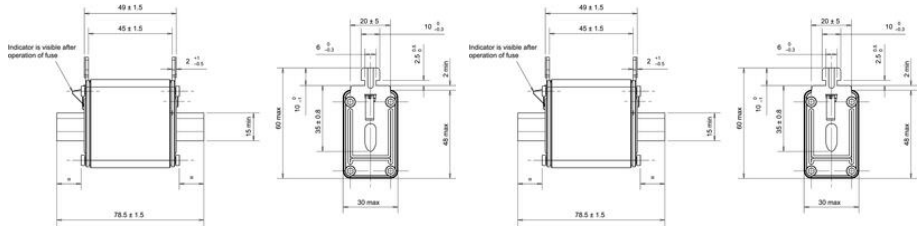
Mersen/Ferraz Shawmut gG type NH fuses are suitable for protecting motor circuits. Partial range breaking capacity. Suitable for short-circuit protection only, interrupts current from 6,3 x In up to maximum breaking capacity. They must be associated with other switchgear for protection against overloads. These fuse-links can have a rated current equal to the motor's nominal current.

Characteristics

- Dimensions according to DIN 43 620 Parts 1 to 4
- Non-Isolated metal gripping slugs
- Double indicator
- Lead-free connectors
- 0% cadmium

SPECIFICATIONS

Approvals	BV, CB, CE, DNV, KEMA KEUR, Lloyd´s, VDE
Breaking Capacity	120 kA
Characteristic (CVL)	aM
Indication (CVL)	Visual, Striker
Manufacturer Part No	Y232505
Nominal current	100 A
Pack Size	3
Voltage AC max	500 V


49 ± 1.5
45 ± 1.5
Indicator is visible after operation of fuse
15 mm
78.5 ± 1.5
20 ± 5
2 min
60 max
35 ± 0.8
45 max
30 max