

VARIOLINE LAMP WITH SOCKET - LED 121/122

Varioline

12210.0-30

LED 122 220-240V AC, PIR sensor, magnet fixing,
Germany/Russia socket



- Maintenance free LED technology
- 120° rotatable, glare free
- Integrated socket and power unit
- Screw or magnet fixing
- Ideal for larger enclosures




PRODUCT DESCRIPTION

The Varioline LED 121/122 lamp has an integrated socket featuring many European countries as well as the US and Australia. This compact and powerful LED lamp is for use in enclosures, with a service life of 60,000 h, and emitting light more than 1,000/1,700 Lm, the LED 121/122 will illuminate even large enclosures to their full depth and height. The integrated socket allows for power connection of laptops and diagnostic devices. The glare-free, 120° rotatable light tube uses Mid-power LEDs.

SPECIFICATIONS

| | |
|-------------------|-------------------|
| Activation | IR sensor |
| Approvals | CE, RoHS |
| Approvals pending | VDE |
| Color | Translucent/White |
| Frequenze | 50/60 Hz |
| Height | 44 mm |
| Humidity Storage | <90% RH |
| IP Class | IP20 |
| Length | 700 mm |
| Light source | LED |
| Material of body | Plastic |
| Mounting | Magnetic mount |

| | |
|-------------------------|-------------------|
| Nominal socket current | 16 A |
| Nominal voltage | 220-240 V AC |
| Operating Humidity | < 90% RH |
| Operational Temperature | -30°C ... +40°C |
| Power Consumption | 16 W |
| Protection Class | I (earthed) |
| Socket | DE/DK/FI/NO/RU/SE |
| Storage temperature | -40°C ... +85°C |
| Weight | 0.4 kg |
| Width | 100 mm |
| Voltage max | 265 V ac |
| Voltage min | 200 V ac |

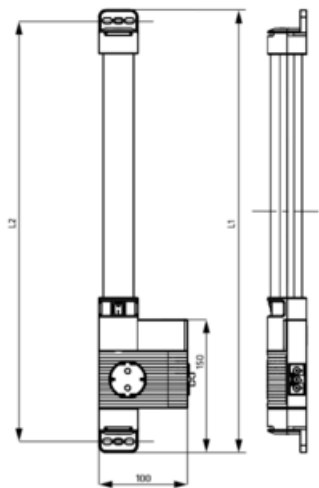

LED 121 (Size 1)


L1 = 500 mm

L2 = 475 mm

LED 122 (Size 2)

L1 = 700 mm

L2 = 675 mm

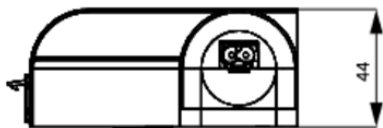

View of magnet fixing

