

## ENCLOSURE LIGHTING - SL 025

### SL 025

02520.0-00

SL 025 Switch, 230V ac, Germany/Russia socket, 16A

- \*\* SOME ITEMS OUT GOING RANGE \*\*
- \*\* SEE OBSOLETE LIST IN DOWNLOADS \*\*
- Integrated outlet
- Low energy fluorescent lamp




### PRODUCT DESCRIPTION

The Slimline is designed to take as little vertical space as possible and thus be concealed behind the cabinet's upper front edge. The risk for glare is thus minimal despite the 11 W low energy lamp providing as much light as a 75 W light bulb. Slimline has an integrated outlet for, for example, a soldering iron or other device, and as standard has a screw-mounted push button switch. Both a magnetic bracket and IR sensor are available as options. If a magnetic bracket is chosen, installation is very simple and the lamp can be easily moved around in the cabinet to suit each situation. If you would also prefer an IR sensor, it only reacts when the door is opened, even if the door is transparent. Installation is facilitated even more in that a door switch is unnecessary.

### SPECIFICATIONS

<b>Activation</b>	Switch
<b>Approvals</b>	CE, EAC, GS, RoHS, VDE
<b>Color</b>	Light Grey
<b>Flamklass</b>	UL94-V0
<b>Frequenze</b>	50/60 Hz
<b>Height</b>	40 mm
<b>Humidity Storage</b>	<90% RH
<b>IP Class</b>	IP20
<b>Length</b>	345 mm
<b>Light source</b>	Low energy Fluorescent lamp
<b>Material Plastic Housing</b>	Plastic
<b>Mounting</b>	Screw fixing

Nominal socket current	16 A
Nominal voltage	230 V AC
Operating Humidity	< 90% RH
Operational Temperature	-20°C ... +50°C
Socket	DE/DK/FI/NO/RU/SE
Storage temperature	-45°C ... +70°C
Weight	0.4 kg
Width	345 mm
Voltage max	230 V ac
Voltage min	230 V ac

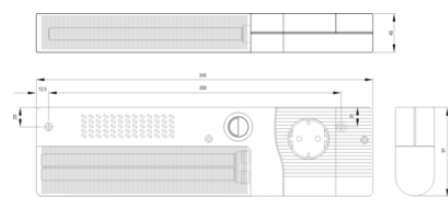

**Electrical socket 1**  
Sweden (SE), Denmark (DK),  
Norway (NO), Finland (FI),  
Germany (DE), Russia (RU), etc